

# RC SERIES FRONT & BACK COUNTERS

# REFRIGERATED LINEAR COUNTERS

ALL METAL CONSTRUCTION

## SOLID DOORS & DRAWERS



## GLASS DOORS & DRAWERS



## STANDARD FEATURES

- ETL approval for UL safety and NSF sanitation
- Patented access system for electrical plumbing and refrigeration
- Stainless steel adjustable feet
- Aisi 304 stainless steel module with BA external finish and 2B internal stainless steel
- Round corners inside the model
- Ecological CFC free polyurethane foam
- Stainless steel intermediate and adjustable shelf
- High capacity evaporator with fan system
- Digital Dixell control with safe housing
- Stainless steel counter bar
- Stainless steel doors
- Ventilated refrigerated
- Self contained
- Steel frame

## OPTIONS

- Humidity control for praline (208-220V)
- Stainless steel sliding drawers
- Glass doors
- Glass sliding drawers
- Stone top
- Casters
- Work top options:

- Flat
- Back splash 8"H (199mm)
- Pre-arrangement for service top
- Round per "Compact Round"

## REFRIGERATED COUNTERS SPECIFICATIONS

MODELS	LENGTHS	DEPTHS	HEIGHT	# OF DOORS	WEIGHTS (LBS)	VOLTAGES	AMPS
500A	20" (500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	1	84	120	2
500B	20" (500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	1	88	120	2
1000A	40" (1000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	2	156	120	6
1000B	40" (1000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	2	201	120	6
1000TA	40" (1000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	1	220	120	7
1000TB	40" (1000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	1	230	120	7
1500A	60" (1500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	3	242	120	4
1500B	60" (1500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	3	251	120	4
1500TA	60" (1500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	2	240	120	8
1500TB	60" (1500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	2	251	120	8
2000A	80" (2000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	4	306	120	5
2000B	80" (2000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	4	317	120	5
2000TA	80" (2000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	3	316	120	8
2000TB	80" (2000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	3	330	120	8
2500A	98" (2500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	5	383	120	7
2500B	98" (2500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	5	418	120	7
2500TA	98" (2500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	4	380	120	9
2500TB	98" (2500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	4	394	120	9
3000A	118" (3000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	6	380	120	7
3000B	118" (3000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	6	395	120	7
3000TA	118" (3000mm)	25 3/4" (655mm)	44 1/2" (1130mm)	5	308	120	10
3000TB	118" (3000mm)	29 1/2" (750mm)	44 1/2" (1130mm)	5	318	120	10
3500TA	137 13/16 (3500mm)	25 3/4" (655mm)	44 1/2" (1130mm)	6	318	120	12
3500TB	137 13/16 (3500mm)	29 1/2" (750mm)	44 1/2" (1130mm)	6	328	120	12

T= SELF CONTAINED | WITHOUT 'T'= REMOTE      A= 25 3/4"D (655mm) | B= 29 1/2"D (750mm)



361-367 Beach Road, Burlingame, CA 94010  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com




# RC SERIES FRONT & BACK COUNTERS



# REFRIGERATED LINEAR COUNTERS

OPTIONAL BACK SPLASH 8" H (199mm) SHOWN

**A - 25 3/4" D (655mm)  
SIDE VIEW**




**B - 29 1/2" D (750mm)  
SIDE VIEW**

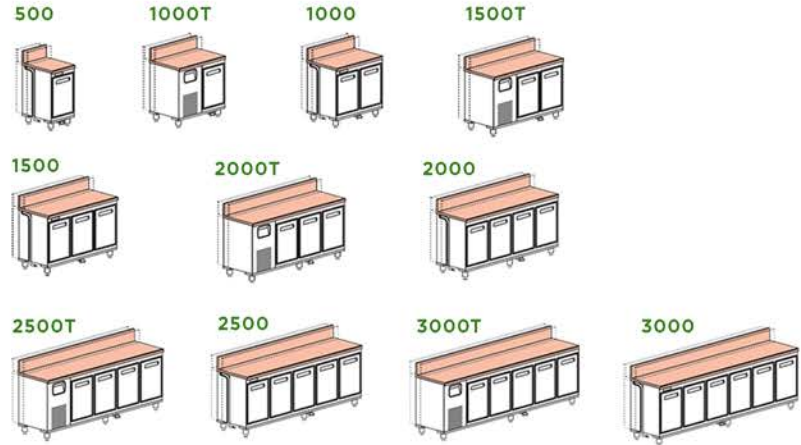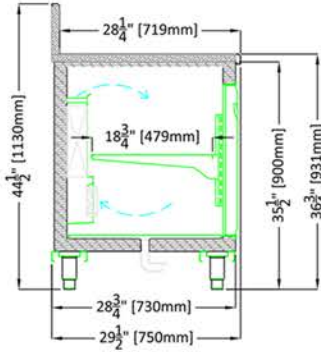


T = Self Contain | Without T = Remote

## PLAN VIEWS

**A - 25 3/4" D (655mm)**

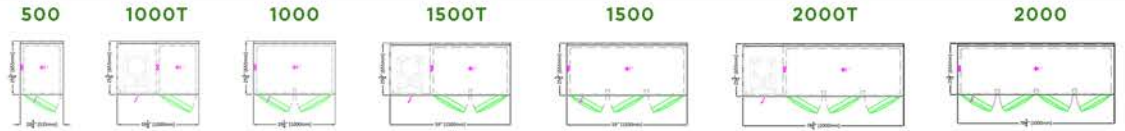


**B - 29 1/2" D (750mm)**



**A - 25 3/4" D (655mm)**




**B - 29 1/2" D (750mm)**



T = SELF CONTAINED  
WITHOUT 'T' = REMOTE

## REAR ELEVATIONS (OPERATOR SIDE)

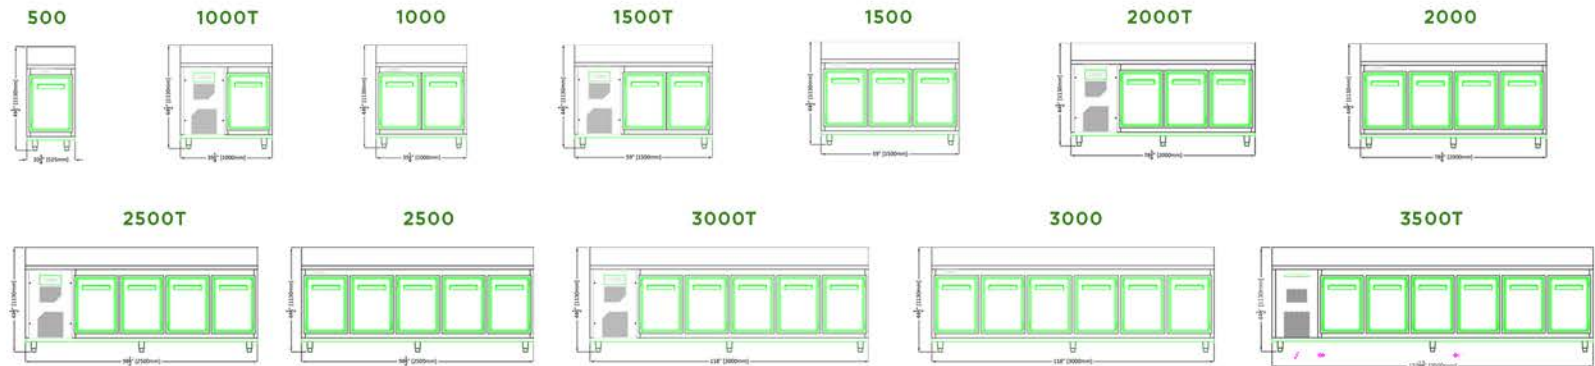

T = SELF CONTAINED  
WITHOUT 'T' = REMOTE



361-367 Beach Road, Burlingame, CA 94010  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com

