

Metro

A true magnet to food




A contemporary showcase that has a broad appeal comes in curved corners and a full refrigeration option, with low and medium temperatures. This showcase is available in Pastry, Deli and Gelato Ice Cream both in linear and curved configurations. Top Glass is lift up hydraulic on all models and heated to prevent fogging or sweating. The front lower portion is a back painted tempered glass that can be removed and replaced with any fascia /décor to fit any ambience.

LED lighting is standard.



Discover the Art of Display...

Metro Photos

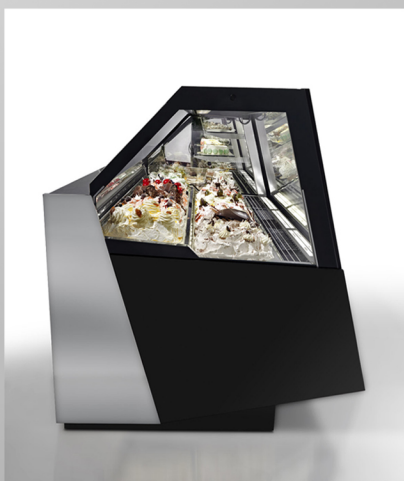


Metro Plus Photos




361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

METRO 2 - 54 5/16"H

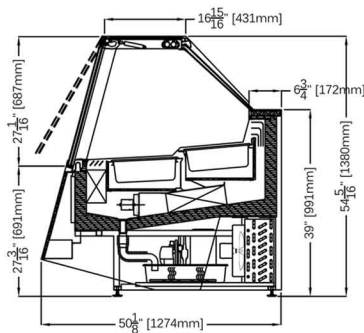

METRO 3 - 61 3/16"H

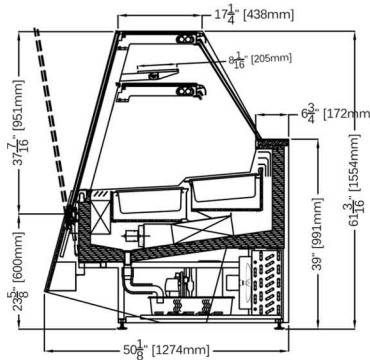


STANDARD FEATURES

Double LED lighting system
Front, top, and side double glasses
Double air flow refrigeration system
Reverse cycle defrost system
Semi-hermetic compressor
Cases ship standard unfinished

OPTIONS

S/s display tray for cakes
Dual temperature switch (-18°C/+5°C) (-0.4°F/+41°F)
Stainless steel or acrylic pans
Round tubs
Night curtain self rolling
Remote condensing unit
Dipper well
Cone holder
Casters
Available heights: 54"H, 61"H with one shelf
Popsicle display tray (stainless steel & plastic. Plastic available in color options (see images on the right))

Round Tubs Layouts (optional):

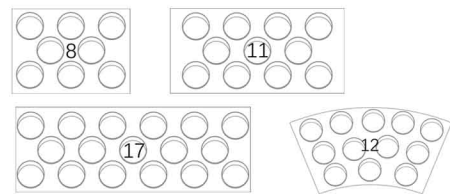


METRO GELATO						
TECHNICAL FEATURES		MODELS				
		METRO 2 G1150	METRO 2 G1650	METRO 2 G2150	METRO 2 G2150 Dual Temp	METRO 2 GA45
External Dimensions (L-D-H)	Inches	45 1/4" - 50 1/8" - 54 5/16"	64 15/16" - 50 1/8" - 54 5/16"	84 5/8" - 50 1/8" - 54 5/16"	84 5/8" - 50 1/8" - 54 5/16"	80 1/4" - 50 1/8" - 54 5/16"
	MM	1150 - 1274 - 1380	1650 - 1274 - 1380	2150 - 1274 - 1380	2150 - 1274 - 1380	2038 - 1274 - 1380
Crated Dimensions (L-D-H)	Inches	51 1/4" - 55 1/4" - 60"	70" - 55 1/4" - 60"	90" - 55 1/4" - 60"	90" - 55 1/4" - 60"	86" - 55 1/4" - 60"
	MM	1301 - 1403 - 1524	1778 - 1403 - 1524	2286 - 1403 - 1524	2286 - 1403 - 1524	2184 - 1403 - 1524
5 Liter Pan Capacity* 14 3/16" x 6 1/2" x 4 3/4" (360mm x 165mm x 120mm)	Pan Configuration	12	18	24	24 (12 + 12)	13
8 Liter Pan Capacity* 14 3/16" x 9 13/16" x 4 3/4" (360mm x 250mm x 120mm)	Pan Configuration	8	12	16	16 (8 + 8)	9
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F	(2) -18°C / -0.4°F	-18°C / -0.4°F
Compressor	Nr./Type	1 / Semi-Hermetic	1 / Semi-Hermetic	1 / Semi-Hermetic	2 / Semi-Hermetic	1 Hermetic
BTU'S @ -25°F Evap Temperature	BTU'S	2450 BTU'S 400/3/50 (EU)	3580 BTU'S 400/3/50 (EU)	4550 BTU'S 400/3/50 (EU)	11,200 BTU'S 400/3/50 (EU)	2850 BTU'S 400/3/50 (EU)
Electric Supply	(V/Ph/Hz)	208-220/3/60Hz (USA)	208-220/3/60Hz (USA)	208-220/3/60Hz (USA)	208-220/3/60Hz (USA)	208-220/1/60Hz (USA)
Power Consumption	(W/A)	1860W / 4.3A	2850W / 7A	3400W / 7.8A	3660W / 7.6A	2660W / 5.6A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	N°/°C/°F/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	290Kgs / 639Lbs	360Kgs / 793Lbs	460Kgs / 1014Lbs	460Kgs / 1014Lbs	360Kgs / 793Lbs
Crated Weights	Kg/Lb	415Kgs / 914Lbs	535Kgs / 1179Lbs	680Kgs / 1499Lbs	680Kgs / 1499Lbs	360Kgs / 793Lbs


* Dimensions are without side panels & with Metro 2 information

* Pans not Included


45° Open
(5 Liter)




45° Open
(8.5 Liter)



METRO 2 - 54 5/16"H




METRO 3 - 61 3/16"H

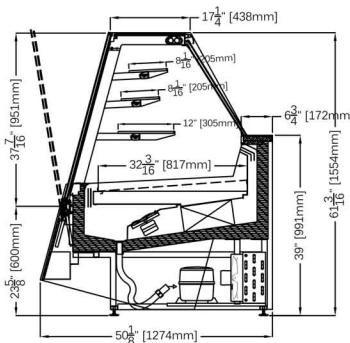

STANDARD FEATURES

- LED lighting system
- Front, top and side double glasses
- Cases ship standard unfinished
- A.L.C airflow level control to manage the temperature on shelves:

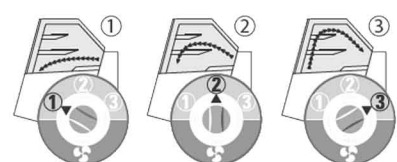


OPTIONS

- Self-rolling night curtain
- Condensate water tray with automatic evaporating system
- S/s steps for display area
- Hot glass shelves with electric control
- Remote condensing unit
- Casters
- Available heights: 54"H with two shelves, 61"H with three shelves




45° Open




METRO DELI/PASTRY					
TECHNICAL FEATURES		MODELS			
		METRO 2 DP1150	METRO 2 DP1650	METRO 2 DP2150	METRO 2 DPA45
External Dimensions (L-D-H)	Inches	45 1/4" - 50 1/8" - 54 5/16"	64 15/16" - 50 1/8" - 54 5/16"	84 5/8" - 50 1/8" - 54 5/16"	80 1/4" - 50 1/8" - 54 5/16"
	MM	1150 - 1274 - 1380	1650 - 1274 - 1380	2150 - 1274 - 1380	2038 - 1274 - 1380
Crated Dimensions (L-D-H)	Inches	51 1/4" - 55 1/4" - 60"	70" - 55 1/4" - 60"	90" - 55 1/4" - 60"	86" - 55 1/4" - 60"
	MM	1301 - 1403 - 1524	1778 - 1403 - 1524	2286 - 1403 - 1524	2184 - 1403 - 1524
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck + Shelf	Deck + Shelf	Deck + Shelf	Deck + Shelf
Operating Temperature	°C / °F	4°C / 39°F	4°C / 39°F	4°C / 39°F	4°C / 39°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +14°F Evap Temperature	BTU'S	3520 BTU'S	4160 BTU'S	5120 BTU'S	4160 BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)	230/1/50 (UE) 120/1/60 (USA)
Power Consumption	(W/A)	1000W / 5.8A	1200W / 8.5A	1600W / 9A	1015 / 6.8A
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic
Climatic Class	N°/°C/°F/H.R.	4+/35/85/70%	4+/35/85/70%	4+/35/85/70%	4+/35/85/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	266Kgs / 586Lbs	350Kgs / 771Lbs	430Kgs / 992Lbs	330Kgs / 727Lbs
Crated Weights	Kg/Lb	391Kgs / 862Lbs	525Kgs / 1157Lbs	650Kgs / 1433Lbs	575Kgs / 1267Lbs

* Dimensions are without side panels & with Metro 2 information

METRO 2 - 54 5/16"H



METRO 3 - 61 3/16"H




STANDARD FEATURES

- LED lighting system
- Front, top and side double glasses
- Humidity control
- Cases ship standard unfinished

OPTIONS

- Self-rolling night curtain
- Condensate water tray with automatic evaporating system
- S/s steps for display area
- Hot glass shelves with electric control
- Remote condensing unit
- Casters
- Available heights: 54"H with two shelves, 61"H with three shelves

45° Open



METRO CHOCOLATE					
TECHNICAL FEATURES		MODELS			
		METRO 2 C1150	METRO 2 C1650	METRO 2 C2150	METRO 2 CA45
External Dimensions (L-D-H)	Inches	45 1/4" - 50 1/8" - 54 5/16"	64 15/16" - 50 1/8" - 54 5/16"	84 5/8" - 50 1/8" - 54 5/16"	80 1/4" - 50 1/8" - 54 5/16"
	MM	1150 - 1274 - 1380	1650 - 1274 - 1380	2150 - 1274 - 1380	2038 - 1274 - 1380
Crated Dimensions (L-D-H)	Inches	51 1/4" - 55 1/4" - 60"	70" - 55 1/4" - 60"	90" - 55 1/4" - 60"	86" - 55 1/4" - 60"
	MM	1301 - 1403 - 1524	1778 - 1403 - 1524	2286 - 1403 - 1524	2184 - 1403 - 1524
Humidity Control	Type	35-70%	35-70%	35-70%	35-70%
Refrigeration Display Area	Type	Deck + Shelf	Deck + Shelf	Deck + Shelf	Deck + Shelf
Operating Temperature	°C / °F	14°C / 58°F	14°C / 58°F	14°C / 58°F	14°C / 58°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +35°F Evap Temperature	BTU'S	3520 BTU'S	4160 BTU'S	5120 BTU'S	4160 BTU'S
Electric Supply	(V/Ph/Hz)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)	230/1/50 (UE) 220/1/60 (USA)
Power Consumption	(W/A)	1085W / 8.2A	1190W / 8A	1490W / 9A	1170W / 8A
Defrost	Mode/Type	Electric	Electric	Electric	Electric
Climatic Class	N°/°C/F°/H.R.	4+/35/95/70%	4+/35/85/70%	4+/35/85/70%	4+/35/85/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	266Kgs / 586Lbs	350Kgs / 771Lbs	430Kgs / 992Lbs	330Kgs / 727Lbs
Crated Weights	Kg/Lb	391Kgs / 862Lbs	525Kgs / 1157Lbs	650Kgs / 1433Lbs	575Kgs / 1267Lbs


* Dimensions are without side panels & with Metro 2 information




361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



METRO 2 - 54 5/16"H

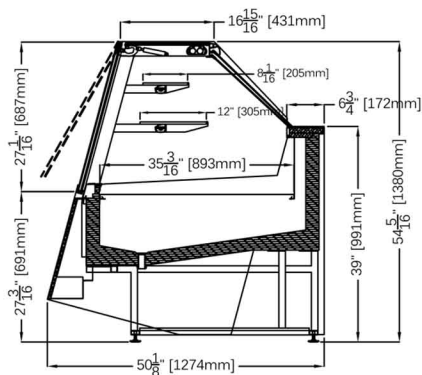

METRO 3 - 61 3/16"H

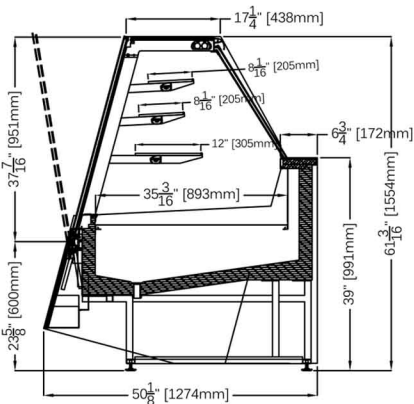


STANDARD FEATURES

- LED lighting system
- Front, top and side double glasses
- Dry case
- Cases ship standard unfinished

OPTIONS

- Self-rolling night curtain
- S/s steps for display area
- Casters
- Available heights: 54"H with two shelves,
- 61"H with three shelves

45° Open




METRO NEUTRAL					
TECHNICAL FEATURES		MODELS			
		METRO 2 N1150	METRO 2 N1650	METRO 2 N2150	METRO 2 NA45
External Dimensions (L-D-H)	Inches	45 1/4" - 50 1/8" - 54 5/16"	64 15/16" - 50 1/8" - 54 5/16"	84 5/8" - 50 1/8" - 54 5/16"	80 1/4" - 50 1/8" - 54 5/16"
	MM	1150 - 1274 - 1380	1650 - 1274 - 1380	2150 - 1274 - 1380	2038 - 1274 - 1380
Crated Dimensions (L-D-H)	Inches	51 1/4" - 55 1/4" - 60"	70" - 55 1/4" - 60"	90" - 55 1/4" - 60"	86" - 55 1/4" - 60"
	MM	1301 - 1403 - 1524	1778 - 1403 - 1524	2286 - 1403 - 1524	2184 - 1403 - 1524
Power Supply	(V)	120V	120V	120V	120V
Amperage	(A)	2A	3A	4A	2A
Operating Temperature	°C / °F	Ambient	Ambient	Ambient	Ambient
Net Weights	Kg/Lb	94Kgs / 216Lbs	118Kgs / 271Lbs	130Kgs / 299Lbs	118Kgs / 271Lbs
Crated Weights	Kg/Lb	110Kgs / 253Lbs	138Kgs / 318Lbs	155Kgs / 356Lbs	138Kgs / 318Lbs


* Dimensions are without side panels & with Metro 2 information

CS (DRY)

METRO 2 - 54 5/16"H




METRO 3 - 61 3/16"H




CBM (BAIN MARIE)

METRO 2 - 54 5/16"H



METRO 3 - 61 3/16"H



STANDARD FEATURES

- LED lighting system
- Front, top and side double glasses
- CS: dry warm top on stainless steel basin
- CBM: hot well food warmer
- Cases ship standard unfinished

OPTIONS

- Self-rolling night curtain
- S/s steps for display area
- Casters
- Heated glass shelf with digital control
- Available heights: CS & CBM 54"H with one shelf, CS 61"H with three shelves, CBM 61"H with two shelves

METRO HOT (CS - DRY)				
TECHNICAL FEATURES		MODELS		
		METRO 2 CS1150	METRO 2 CS1650	METRO 2 CS2150
External Dimensions (L-D-H)	Inches	45 1/4" - 50 1/8" - 54 5/16"	64 15/16" - 50 1/8" - 54 5/16"	84 5/8" - 50 1/8" - 54 5/16"
	MM	1150 - 1274 - 1380	1650 - 1274 - 1380	2150 - 1274 - 1380
Crated Dimensions (L-D-H)	Inches	51 1/4" - 55 1/4" - 60"	70" - 55 1/4" - 60"	90" - 55 1/4" - 60"
	MM	1301 - 1403 - 1524	1778 - 1403 - 1524	2286 - 1403 - 1524
Power Supply	(V)	220V	220V	220V
Power Consumption	(A)	500W	1000W	1210W
Operating Temperature	°C / °F	80°C / 177°F	80°C / 177°F	80°C / 177°F
Net Weights	Kg/Lb	104Kgs / 239Lbs	144Kgs / 331Lbs	188Kgs / 432Lbs
Crated Weights	Kg/Lb	124Kgs / 285Lbs	170Kgs / 391Lbs	205Kgs / 470Lbs

* Dimensions are without side panels & with Metro 2 information


METRO HOT (CBM - BAIN MARIE)				
TECHNICAL FEATURES		MODELS		
		METRO 2 CBM1150	METRO 2 CBM1650	METRO 2 CBM2150
External Dimensions (L-D-H)	Inches	45 1/4" - 50 1/8" - 54 5/16"	64 15/16" - 50 1/8" - 54 5/16"	84 5/8" - 50 1/8" - 54 5/16"
	MM	1150 - 1274 - 1380	1650 - 1274 - 1380	2150 - 1274 - 1380
Crated Dimensions (L-D-H)	Inches	51 1/4" - 55 1/4" - 60"	70" - 55 1/4" - 60"	90" - 55 1/4" - 60"
	MM	1301 - 1403 - 1524	1778 - 1403 - 1524	2286 - 1403 - 1524
Power Supply	(V)	220V	220V	220V
Power Consumption	(A)	1500W	2030W	3040W
Operating Temperature	°C / °F	80°C / 177°F	80°C / 177°F	80°C / 177°F
Net Weights	Kg/Lb	104Kgs / 239Lbs	144Kgs / 331Lbs	188Kgs / 432Lbs
Crated Weights	Kg/Lb	124Kgs / 285Lbs	170Kgs / 391Lbs	205Kgs / 470Lbs

* Dimensions are without side panels & with Metro 2 information



METRO PLUS

Deli/Pastry Showcase Medium & Low Temp

**MEDIUM TEMP (+4°C/39.2°F)
& LOW TEMP (-20°C/-4°F)**

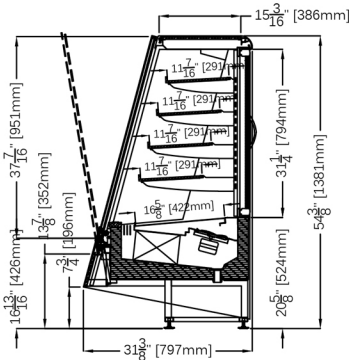

OPTIONAL: SELF CONTAINED

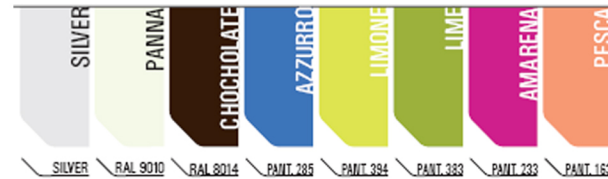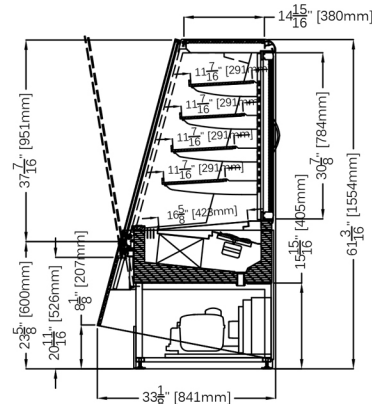

STANDARD FEATURES

LED lighting system
Front, top and side double glasses
Remote condensing unit
Cases ship standard unfinished

OPTIONS

Dual temperature switch (-20°C/+4°C) (-4°F/+39.2°F)
Self contained
Casters

METRO PLUS DELI/PASTRY					
TECHNICAL FEATURES		MEDIUM TEMP MODELS		LOW TEMP MODELS	
		METRO PLUS DPMT1150	METRO PLUS DPMT1650	METRO PLUS DPLT1150	METRO PLUS DPLT1650
External Dimensions (L-D-H)	Inches	45 1/4" - 31 1/8" - 54 3/8"	64 15/16" - 31 1/8" - 54 3/8"	45 1/4" - 33 1/8" - 61 3/16"	64 15/16" - 33 1/8" - 61 3/16"
Inches-MM	MM	1150 - 797 - 1381	1650 - 797 - 1381	1150 - 841 - 1554	1650 - 841 - 1554
Crated Dimensions (L-D-H)	Inches	51 1/4" - 38 5/8" - 60"	78" - 38 5/8" - 63 3/4"	54 3/4" - 38 5/8" - 67"	78" - 38 5/8" - 67"
Inches-MM	MM	1301 - 980 - 1524	1981 - 980 - 1620	1390 - 980 - 1701	1981 - 980 - 11701
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck / Shelves	Deck / Shelves	Deck / Shelves	Deck / Shelves
Operating Temperature	°C / °F	+4°C / 39.2°F	+4°C / 39.2°F	-20°C / 39.2°F	-20°C / 39.2°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Semihermetic	1 / Semihermetic
BTU'S @ +35°F Evap Temp (Low Temp -25°F Evap Temp)	BTU'S	3840 BTU'S	4480 BTU'S	7360 BTU'S	11,520 BTU'S
		230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)
Electric Supply	(V/Ph/Hz)	120/1/60 (USA)	120/1/60 (USA)	220/1/60 (USA)	220/1/60 (USA)
Power Consumption	(W/A)	1000W / 5.8A	1200W / 8.5A	1600W / 9A	1015W / 6.8A
Defrost	Mode/Type	Electric	Electric	Invert Cycle	Invert Cycle
Climatic Class	N°/°C/°F/H.R.	4+ / 35/95/70%	4+ / 35/95/70%	4+ / 35/95/70%	4+ / 35/95/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	170Kgs / 374Lbs	220Kgs / 485Lbs	170Kgs / 374Lbs	220Kgs / 485Lbs
Crated Weights	Kg/Lb	260Kgs / 573Lbs	340Kgs / 749Lbs	260Kgs / 573Lbs	340Kgs / 749Lbs

* Dimensions are without side panels



361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

