

# Centro

*An all time profit center*



All roads lead to Rome... or do they. They lead to Centro, transform dead space into profit centers with class. This Island cold display is a great addition to any food shop, comes in remote application and can be custom finished on the interior or exterior.



361-367 Beach Road, Burlingame, CA 94010  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com





## STANDARD FEATURES

- Adjustable deck
- Stainless steel lower interior foam tub
- Galvanized chassis structure
- Tempered glass deflector
- Electronic control system to maintain balanced temperatures
- Case ship standard unfinished



## OPTIONS

- RAL color/laminate front and side panels
- Remote condensing unit, water cooled
- Casters

| CENTRO                         |           |                            |                           |                            |                            |
|--------------------------------|-----------|----------------------------|---------------------------|----------------------------|----------------------------|
| TECHNICAL FEATURES             |           | MODELS                     |                           |                            |                            |
|                                |           | CENTRO 900                 | CENTRO 1000               | CENTRO 1300                | CENTRO 1500                |
| External Dimensions (L-D-H)    | Inches    | *35 7/16" - 48 1/16" - 34" | *39 3/8" - 48 1/16" - 34" | *51 3/16" - 48 1/16" - 34" | *59 1/16" - 48 1/16" - 34" |
|                                | MM        | *900 - 1221 - 864          | *1000 - 1221 - 864        | *1300 - 1221 - 864         | *1500 - 1221 - 864         |
| Crated Dimensions (L-D-H)      | Inches    | 40" - 55" - 45"            | 46" - 55" - 45"           | 57" - 55" - 45"            | 66" - 55" - 45"            |
|                                | MM        | 1000 - 1397 - 1150         | 1170 - 1397 - 1150        | 1448 - 1397 - 1150         | 1676 - 1397 - 1150         |
| Refrigeration                  | Type      | Ventilated                 | Ventilated                | Ventilated                 | Ventilated                 |
| Refrigeration Display Area     | Type      | Deck                       | Deck                      | Deck                       | Deck                       |
| Operating Temperature          | °F        | 40°F                       | 40°F                      | 40°F                       | 40°F                       |
| Compressor                     | Nr./Type  | Hermetic                   | Hermetic                  | Hermetic                   | Hermetic                   |
| BTU'S @ +14°F Evap Temperature | BTU'S     | 3900 BTU'S                 | 4100 BTU'S                | 4800 BTU'S                 | 5200 BTU'S                 |
| Electric Supply                | (V/Ph/Hz) | 208-220/1/60               | 208-220/1/60              | 208-220/1/60               | 208-220/1/60               |
| Power Consumption              | (A)       | 8.6A                       | 10A                       | 11.6A                      | 12.8A                      |
| Defrost                        | Mode/Type | Automatic/Electrical       | Automatic/Electrical      | Automatic/Electrical       | Automatic/Electrical       |
| Refrigerant Gas                | Type      | R452A                      | R452A                     | R452A                      | R452A                      |
| Net Weights                    | Kg/Lb     | 150Kgs / 330Lbs            | 170Kgs / 374Lbs           | 190Kgs / 418Lbs            | 210Kgs / 462Lbs            |
| Crated Weights                 | Kg/Lb     | 241Kgs / 530Lbs            | 246Kgs / 540Lbs           | 250Kgs / 550Lbs            | 255Kgs / 560Lbs            |

\* DIMENSIONS ARE WITHOUT SIDE PANELS

\* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com







| CENTRO                         |           |                             |                           |                            |
|--------------------------------|-----------|-----------------------------|---------------------------|----------------------------|
| TECHNICAL FEATURES             |           | MODELS                      |                           |                            |
|                                |           | CENTRO 1700                 | CENTRO 2000               | CENTRO 2500                |
| External Dimensions (L-D-H)    | Inches    | *66 15/16" - 48 1/16" - 34" | *78 3/4" - 48 1/16" - 34" | *98 7/16" - 48 1/16" - 34" |
| Inches-MM                      | MM        | *1700 - 1221 - 864          | *2000 - 1221 - 864        | *2500 - 1000 - 864         |
| Crated Dimensions (L-D-H)      | Inches    | 74" - 55" - 45"             | 84" - 55" - 45"           | 105" - 55" - 45"           |
| Inches-MM                      | MM        | 1880 - 1397 - 1150          | 2133 - 1397 - 1150        | 2667 - 1397 - 1150         |
| Refrigeration                  | Type      | Ventilated                  | Ventilated                | Ventilated                 |
| Refrigeration Display Area     | Type      | Deck                        | Deck                      | Deck                       |
| Operating Temperature          | °F        | 40°F                        | 40°F                      | 40°F                       |
| Compressor                     | Nr./Type  | Hermetic                    | Hermetic                  | Hermetic                   |
| BTU'S @ +14°F Evap Temperature | BTU'S     | 5700 BTU'S                  | 6100 BTU'S                | 6400 BTU'S                 |
| Electric Supply                | (V/Ph/Hz) | 208-220/1/60                | 208-220/1/60              | 208-220/1/60               |
| Power Consumption              | (A)       | 14A                         | 15.6A                     | 17A                        |
| Defrost                        | Mode/Type | Automatic/Electrical        | Automatic/Electrical      | Automatic/Electrical       |
| Refrigerant Gas                | Type      | R452A                       | R452A                     | R452A                      |
| Net Weights                    | Kg/Lb     | 218Kgs / 479Lbs             | 230Kgs / 506Lbs           | 241Kgs / 530Lbs            |
| Crated Weights                 | Kg/Lb     | 260Kgs / 570Lbs             | 264Kgs / 580Lbs           | 272Kgs / 600Lbs            |

\* DIMENSIONS ARE WITHOUT SIDE PANELS


SECTION VIEW

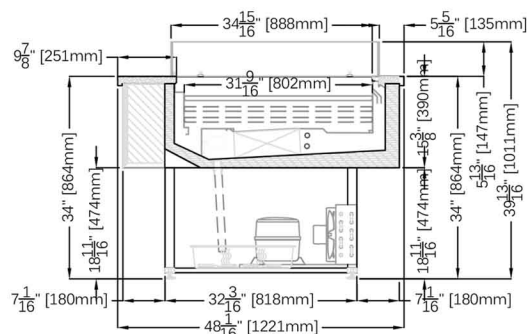

REAR ELEVATIONS (OPERATOR SIDE)

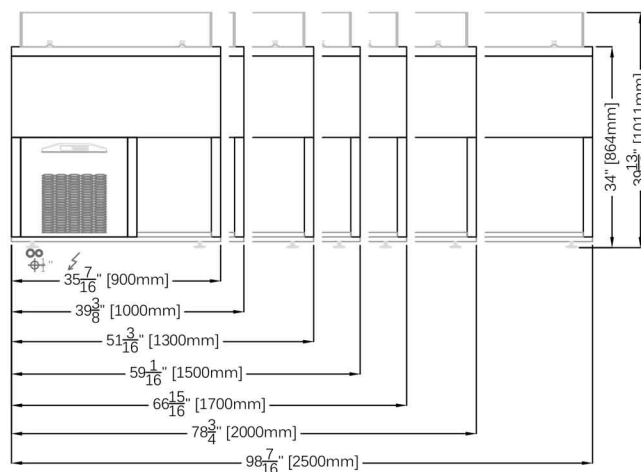

PLAN VIEWS (CUSTOMER SIDE)

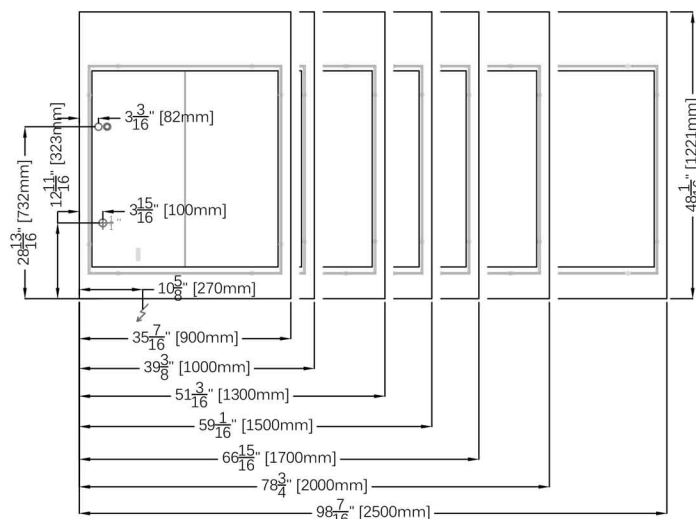

ELECTRICAL LEGEND

|      |                    |
|------|--------------------|
| ∞    | REFRIGERATED LINES |
| ⊕ 1" | DRAIN              |
| ⚡    | POWER              |

\* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.