



Photo shown with optional front and sides HPL white. Standard cases are polished stainless steel exterior.



Visit our website for more finishing options and RAL colors  
[www.oscartek.com](http://www.oscartek.com)

# MURO H11 DRY/HOT

## Self-Serve Showcase

**MURO H11 DRY/HOT MODELS:** MURO H11 H1000, MURO H11 H1200, MURO H11 H1500, MURO H11 H1800, MURO H11 H2000, MURO H11 HA90SQ

### STANDARD FEATURES

- Double pane side glass ends
- Heat lamp
- Stainless steel shelf
- Polished stainless steel interior and exterior
- Adjustable feet
- Cases ship standard polished stainless steel interior and exterior

### OPTIONS

- Stainless steel side panels in lieu of glass
- Shelf fence for inclined position
- Epoxy RAL color interior and exterior over stainless steel
- RAL color/custom plastic wood laminate exterior front and sides
- Unfinished panels to accept millwork by others
- Custom height chassis modification
- Casters

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.



Discover the Art of Display...

Project Name: \_\_\_\_\_


Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

# MURO H11 DRY/HOT


MURO H11 DRY/HOT MODELS: MURO H11 H1000, MURO H11 H1200, MURO H11 H1500, MURO H11 H1800, MURO H11 H2000, MURO H11 HA90SQ

## STANDARD: MURO H11 DRY/HOT – SELF-SERVE


### PLAN VIEWS

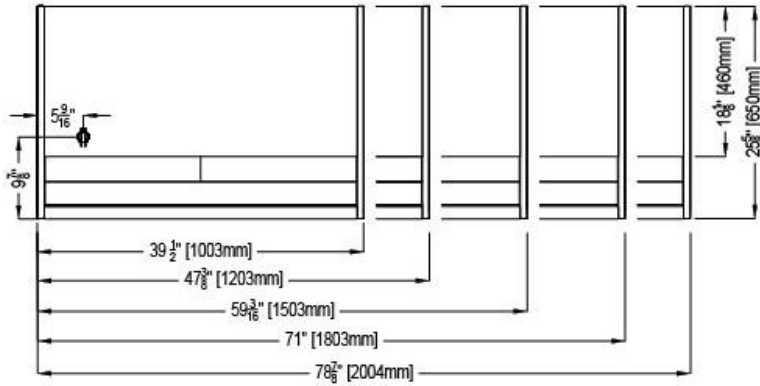

### FRONT ELEVATIONS: (CUSTOMER SIDE)

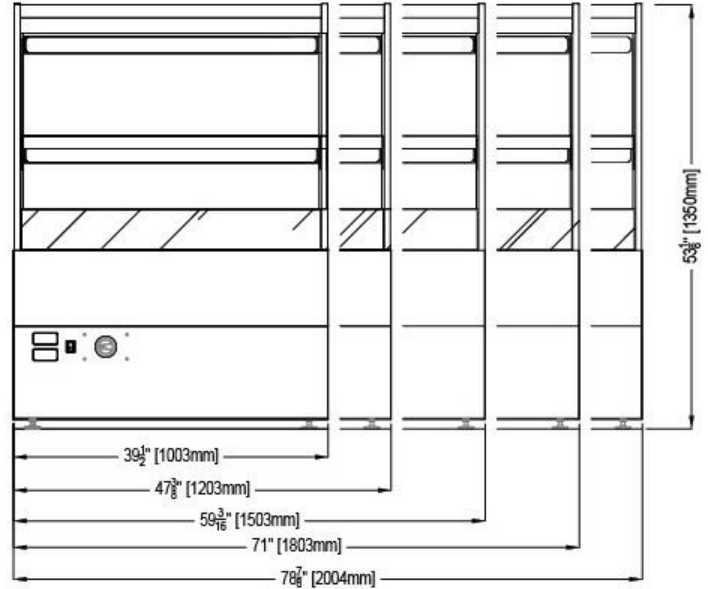

## STANDARD: MURO H11 DRY/HOT A90SQ: PLAN VIEW

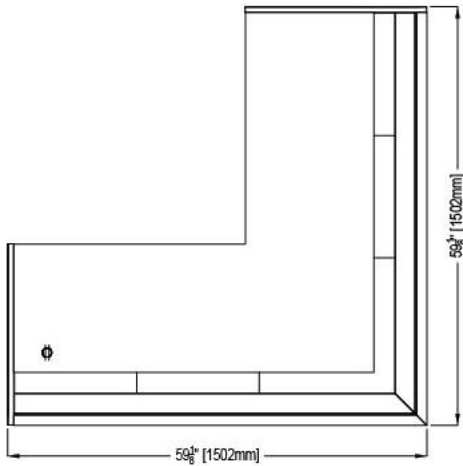

### ELECTRICAL LEGEND

|   |       |
|---|-------|
| ⌀ | POWER |
|---|-------|

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 650.342.2400 | Fax: 650.342.7400  
www.oscartek.com




## MURO H11 DRY/HOT

MURO H11 DRY/HOT MODELS: MURO H11 H1000, MURO H11 H1200, MURO H11 H1500, MURO H11 H1800, MURO H11 H2000, MURO H11 HA90SQ

### STANDARD: MURO H11 DRY/HOT – SELF-SERVE

#### SECTION VIEW:

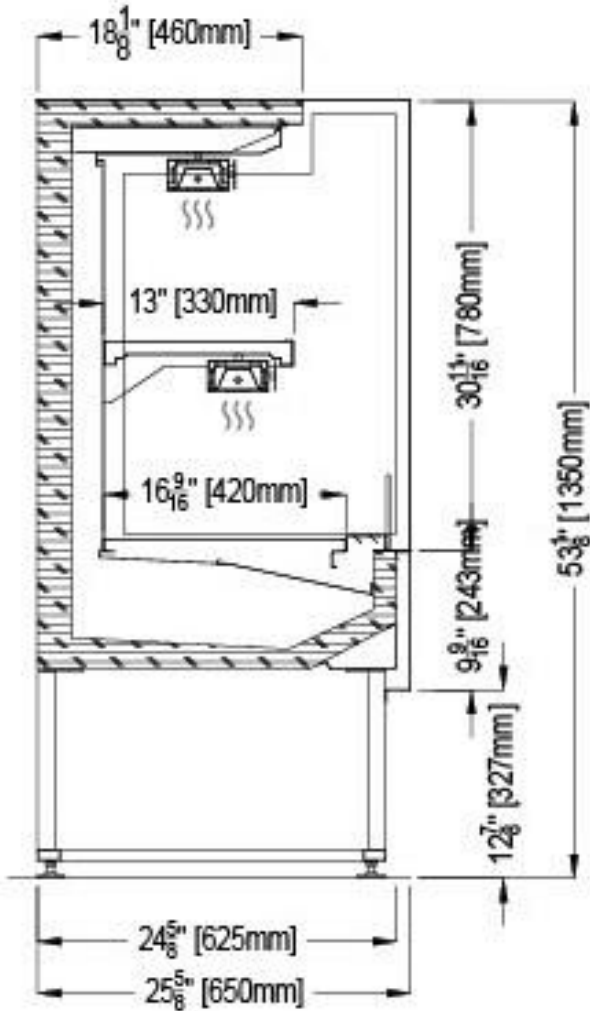

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
 512 South Airport Blvd., South San Francisco, CA 94080  
 Tel: 650.342.2400 | Fax: 650.342.7400  
 www.oscartek.com





Project Name: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

## MURO H11 DRY/HOT

MURO H11 DRY/HOT MODELS: MURO H11 H1000, MURO H11 H1200, MURO H11 H1500, MURO H11 H1800, MURO H11 H2000, MURO H11 HA90SQ

| MURO H11 DRY-HOT SELF SERVE              |              |   |  |   |
|--|--------------|---|--|---|
| TECHNICAL FEATURES                       |              | MODELS  |  |   |
|  |              | MURO H11 H1000                                      | MURO H11 H1200                                     | MURO H11 H1500                                      |
| External Dimensions (L-D-H)<br>Inches-MM | Inches<br>MM | * 39 1/2" - 25 5/8" - 53 1/8"<br>*1003 - 650 - 1350 | *47 3/8" - 25 5/8" - 53 1/8"<br>*1203 - 650 - 1350 | *59 3/16" - 25 5/8" - 53 1/8"<br>*1503 - 650 - 1350 |
| Crated Dimensions (L-D-H)<br>Inches-MM   | Inches<br>MM | 46" - 33" - 60"<br>1168 - 838 - 1524                | 55" - 33" - 60"<br>1397 - 838 - 1524               | 66" - 33" - 60"<br>1676 - 838 - 1524                |
| Operating Temperature                    | °F           | 140   | 140  | 140   |
| Electric Supply                          | (V/Ph/Hz)    | 208-220/1/60  | 208-220/1/60                                       | 208-220/1/60  |
| Power Consumption                        | (W/A)        | 1200/6,0  | 1500/7,5   | 1800/9,0  |
| Climate Class                            | °F /H.R.     | 75°F-55%RH  | 75°F-55%RH   | 75°F-55%RH  |
| Net Weights                              | Lb           | 260   | 330  | 430   |
| Crated Weights                           | Lb           | 330   | 400  | 510   |

**\*DIMENSIONS ARE WITH POLISHED S/S SIDES**

| MURO H11 DRY-HOT SELF SERVE              |              |  |  |   |
|--|--------------|--|--|---|
| TECHNICAL FEATURES                       |              | MODELS   |  |   |
|  |              | MURO H11 H1800                                 | MURO H11 H2000                                     | MURO H11 HA90                                       |
| External Dimensions (L-D-H)<br>Inches-MM | Inches<br>MM | *71" - 25 5/8" - 53 1/8"<br>*1803 - 650 - 1350 | *78 7/8" - 25 5/8" - 53 1/8"<br>*2004 - 650 - 1350 | *59 1/8" - 25 5/8" - 53 3/16"<br>*1502 - 650 - 1351 |
| Crated Dimensions (L-D-H)<br>Inches-MM   | Inches<br>MM | 77" - 33" - 60"<br>1955 - 838 - 1524           | 77" - 33" - 60"<br>1955 - 838 - 1524               | 66" - 33" - 60"<br>1676 - 838 - 1524                |
| Operating Temperature                    | °F           | 140  | 140  | 140   |
| Electric Supply                          | (V/Ph/Hz)    | 208-220/1/60                                   | 208-220/1/60                                       | 208-220/1/60  |
| Power Consumption                        | (W/A)        | 2200/11,0                                      | 2300/11,5  | 2600/13,5   |
| Climate Class                            | °F /H.R.     | 75°F-55%RH                                     | 75°F-55%RH   | 75°F-55%RH  |
| Net Weights                              | Lb           | 500  | 560  | 630   |
| Crated Weights                           | Lb           | 590  | 650  | 720   |

**\*DIMENSIONS ARE WITH POLISHED S/S SIDES**

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
 512 South Airport Blvd., South San Francisco, CA 94080  
 Tel: 650.342.2400 | Fax: 650.342.7400  
 www.oscartek.com

