



Photo shown with Muro H78 PRO Pro Neutral shown with Epoxy coated black interior and RAL color exterior options



Visit our website for more finishing options and RAL colors
www.oscartek.com

MURO H78 PRO NEUTRAL SELF SERVE

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

STANDARD FEATURES

- Double pane glass ends
- Diffused 3000°K LED lighting on each shelf and canopy
- Straight or inclined shelves
- Roll down curtain
- Stainless steel foam in place bottom and top
- Adjustable feet
- Cases ship standard polished stainless steel interior and exterior

OPTIONS

- Solid sides: add 13/16" each side
- Roll down locking shutter with solid sides required: add 1 3/4" each side
- Sliding doors with solid sides required: add 13/16" each side
- Swing doors: available in glass sides and solid sides (add 13/16" each side)
- Joint Kit for multiplexing continuous line up
- Shelf fence for inclined position
- Tempered Glass shelves in lieu of stainless steel
- Epoxy RAL color interior and exterior over stainless steel
- RAL color/custom plastic wood laminate exterior front and sides
- Unfinished panels to accept millwork by others
- Cold or Dry Storage on Remote application
- Casters
- Custom height Chassis modification
- Able to match to Provino wine, charcuterie, and Freezer

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.




Project Name: _____
 Item #: _____ Quantity: _____

MURO H78 PRO NEUTRAL


MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

STANDARD: MURO H78 PRO NEUTRAL SELF SERVE

PLAN VIEWS

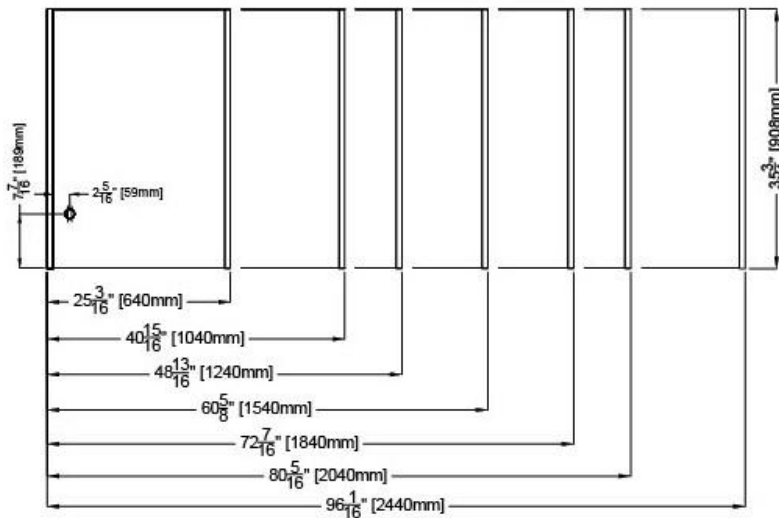

FRONT ELEVATIONS

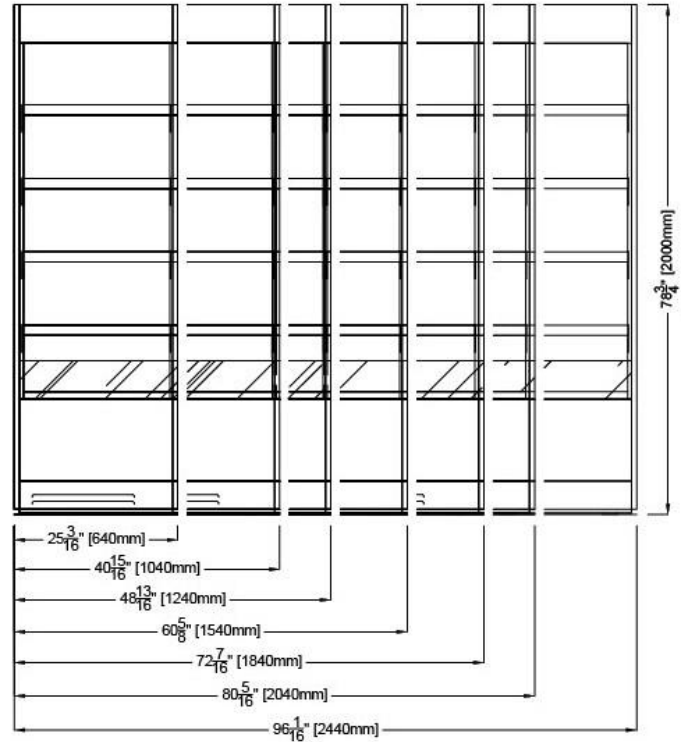

ELECTRICAL LEGEND

ϕ	POWER
--------	-------

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
 512 South Airport Blvd., South San Francisco, CA 94080
 Tel: 650.342.2400 | Fax: 650.342.7400
 www.oscartek.com




MURO H78 PRO NEUTRAL

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

STANDARD: MURO H78 PRO NEUTRAL WITH GLASS SIDES SECTION VIEW

STANDARD:
TO MATCH WITH MURO H78 PRO
REFRIDGERATED REMOTE
CONDENSING UNIT

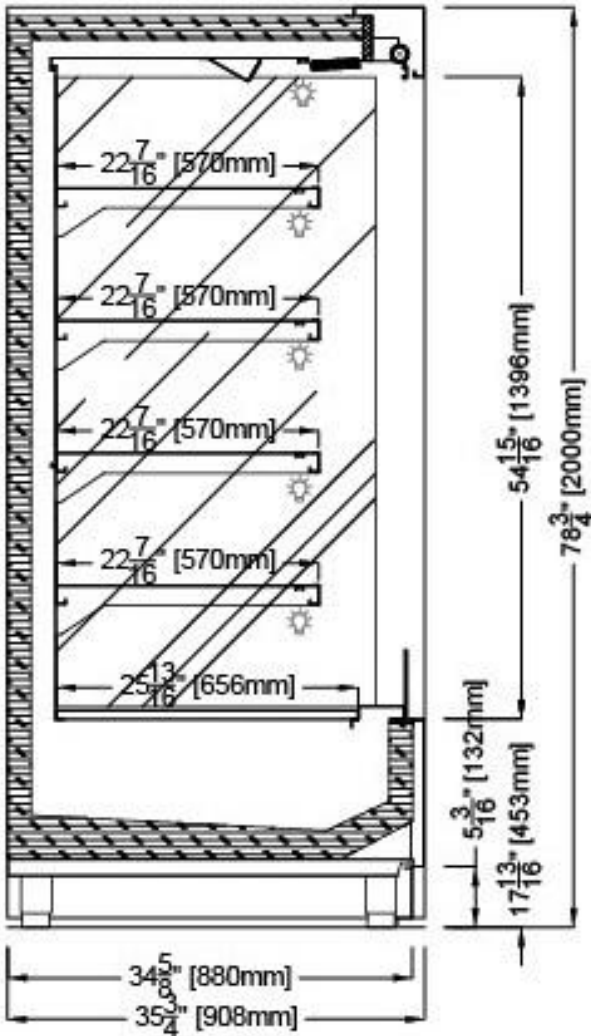

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com




MURO H78 PRO NEUTRAL


MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

OPTIONALS: MURO H78 PRO NEUTRAL WITH SLIDING GLASS DOORS SECTION VIEWS


**OPTIONAL:
TO MATCH WITH MURO H78 PRO
REFRIDGERATED BOTTOM
MOUNT CONDENSING UNIT**

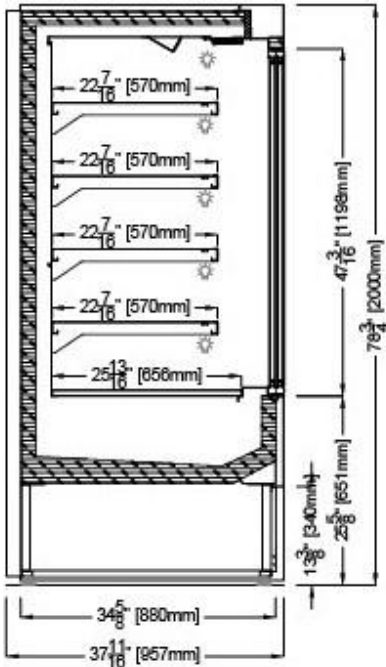

**OPTIONAL:
TO MATCH WITH MURO H78 PRO
REFRIDGERATED TOP
MOUNT CONDENSING UNIT**

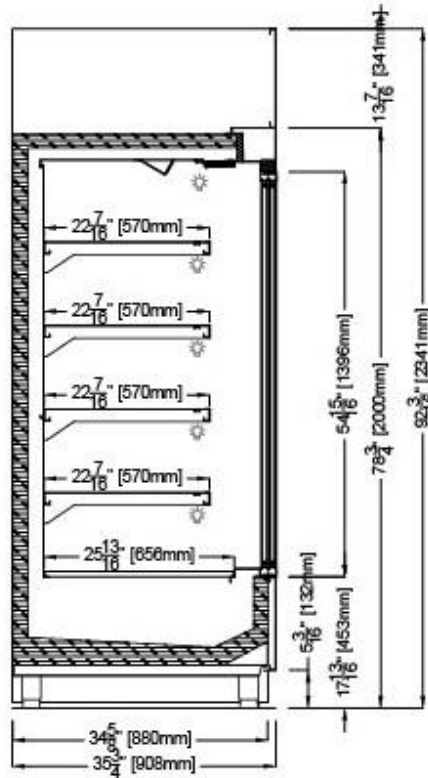

**OPTIONAL:
TO MATCH WITH MURO H78 PRO
REFRIDGERATED REMOTE
CONDENSING UNIT**

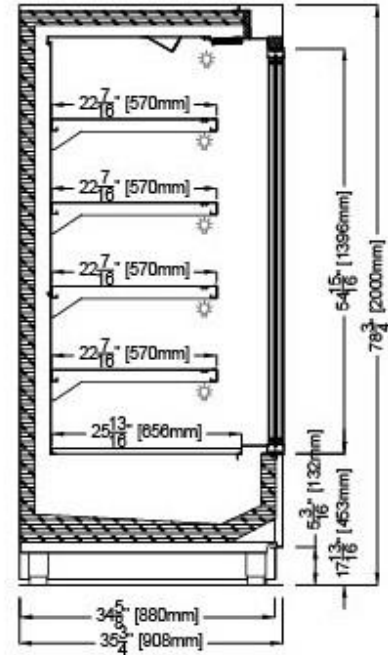


*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

MURO H78 PRO NEUTRAL


MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

OPTIONALS: MURO H78 PRO NEUTRAL WITH SWING GLASS DOORS SECTION VIEWS


**OPTIONAL:
TO MATCH WITH MURO H78 PRO
REFRIDGERATED BOTTOM
MOUNT CONDENSING UNIT**

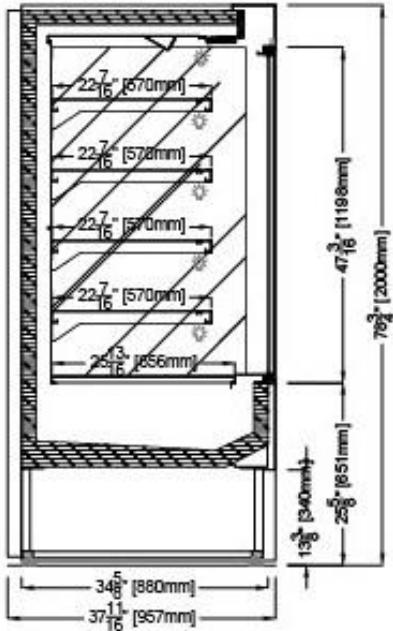

**OPTIONAL:
TO MATCH WITH MURO H78 PRO
REFRIDGERATED TOP
MOUNT CONDENSING UNIT**

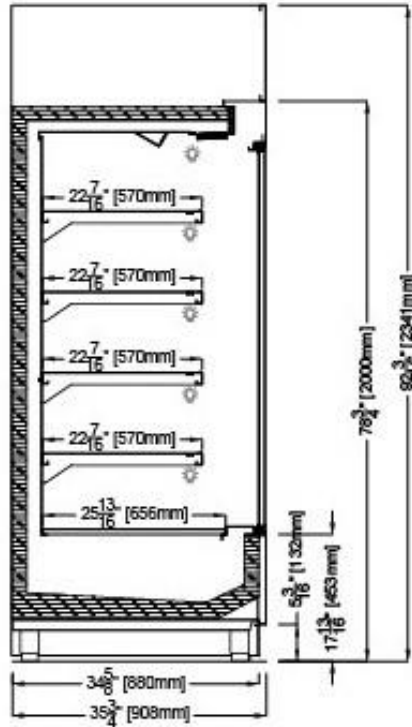

**OPTIONAL:
TO MATCH WITH MURO H78 PRO
REFRIDGERATED REMOTE
CONDENSING UNIT**

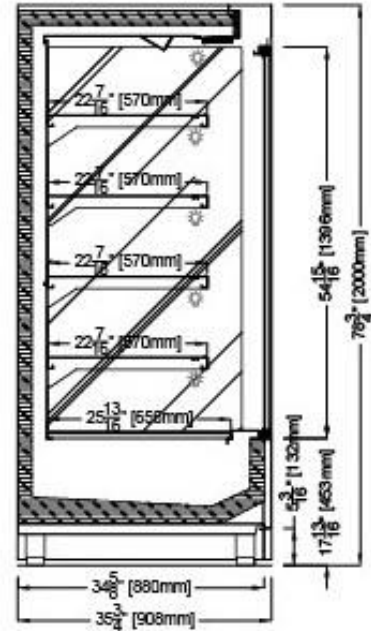


*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

MURO H78 PRO NEUTRAL

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

OPTIONALS: MURO H78 PRO NEUTRAL WITH ROLL DOWN SHUTTER SECTION VIEWS

**OPTIONAL:
TO MATCH WITH MURO H78 PRO
REFRIDGERATED REMOTE
CONDENSING UNIT**

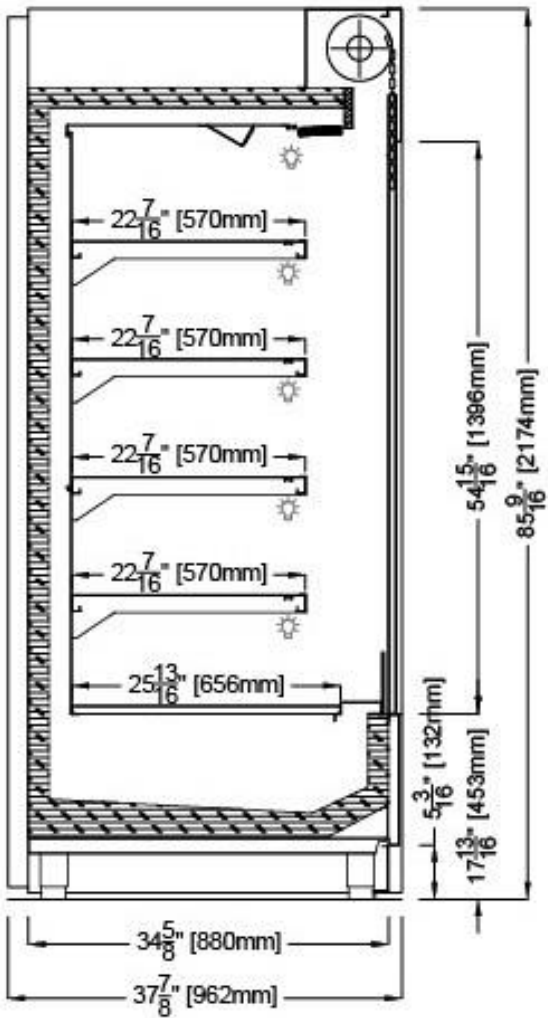

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com





Discover the Art of Display...

Project Name: _____

Item #: _____ Quantity: _____

MURO H78 PRO NEUTRAL

MODELS: MURO H78 PRO N600, MURO H78 PRO N1000, MURO H78 PRO N1200, MURO H78 PRO N1500, MURO H78 PRO N1800, MURO H78 PRO N2000, MURO H78 PRO N2400

MURO H78 PRO SELF SERVE NEUTRAL					
TECHNICAL FEATURES		MODELS			
		MURO H78 PRO N600	MURO H78 PRO N1000	MURO H78 PRO N1200	MURO H78 PRO N1500
External Dimensions (L-D-H) Inches-MM	Inches MM	*25 3/16" - 35 3/4" - 78 3/4" *640 - 908 - 2000	*40 15/16" - 35 3/4" - 78 3/4" *1040 - 908 - 2000	*48 13/16" - 35 3/4" - 78 3/4" *1240 - 908 - 2000	*60 5/8" - 35 3/4" - 78 3/4" *1540 - 1117 - 2000
Crated Dimensions (L-D-H) Inches-MM	Inches MM	31" - 44" - 85" 787 - 1117 - 2160	46" - 44" - 85" 1168 - 1117 - 2160	56" - 44" - 85" 1422 - 1117 - 2160	67" - 44" - 85" 1701 - 1117 - 2160
Operating Temperature	°F	Ambient	Ambient	Ambient	Ambient
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	180/1.5	198/1.65	240/2	270/2.25
Net Weights	Lb	490	785	930	1025
Crated Weights	Lb	670	965	1110	1238

***DIMENSIONS ARE WITH STANDARD GLASS SIDES**

MURO H78 PRO SELF SERVE NEUTRAL					
TECHNICAL FEATURES		MODELS			
		MURO H78 PRO N1800	MURO H78 PRO N2000	MURO H78 PRO N2400	
External Dimensions (L-D-H) Inches-MM	Inches MM	*72 7/16" - 35 3/4" - 78 3/4" *1840 - 908 - 2000	*80 5/16" - 35 3/4" - 78 3/4" *2040 - 908 - 2000	*96 1/16" - 35 3/4" - 78 3/4" *2440 - 908 - 2000	
Crated Dimensions (L-D-H) Inches-MM	Inches MM	79" - 44" - 85" 2006 - 1117 - 2160	87" - 44" - 85" 2209 - 1117 - 2160	103" - 44" - 85" 2616 - 1117 - 2160	
Operating Temperature	°F	Ambient	Ambient	Ambient	
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60	
Power Consumption	(W/A)	288/2.4	320/2.65	360/3	
Net Weights	Lb	1065	1100	1810	
Crated Weights	Lb	1280	1325	2170	

***DIMENSIONS ARE WITH GLASS SIDES**

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 650.342.2400 | Fax: 650.342.7400
www.oscartek.com

