



Discover the Art of Display...

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

### STANDARD FEATURES

- Standard 34"H, 30"D – Optima 1000, Optima 1250, Optima 1500
- Standard 35"H, 30"D – Optima 2000 only
- Solid stainless steel sides
- Dixell digital control
- Bottom evaporator ventilation cooling
- Stainless steel foam in place bottom and top
- Adjustable feet
- Roll down night curtain
- Open back shelving
- Cases ship standard polished stainless steel interior and exterior

### OPTIONS

- Available in 34"H, narrow depth 26"D – Optima 1000, Optima 1250, Optima 1500
- Available in 35"H, narrow depth 26"D – Optima 2000 only
- Available in 34"H, 30"D with top glass and shelf – Combi: Optima 1000, Optima 1250, Optima 1500. Total height 50"H
- Available in 35"H, 30"D with top glass and shelf – Combi: Optima 2000 only. Total height 51"H
- Available in 34"H with night shutter – Optima 1000, Optima 1250, Optima 1500
- Available in 32 1/2"H with legs and 32 3/8"H with casters to fit case under 34"H counter by customers (30"D, narrow 26"D): Optima 1000, Optima 1250, Optima 1500
- Available in 32 1/2"H with legs and 32 3/8"H with casters (top glass with shelf – Combi). Total height 48 3/8"H: Optima 1000, Optima 1250, Optima 1500
- Black/white interior
- Remote/water cooled condensing unit
- RAL color/laminate front and side panels
- Unfinished panels to accept custom millwork by others
- Heated pan for evaporator
- Casters

# OPTIMA

## Self-Serve Air Screen Refrigeration Showcase

MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500, OPTIMA 2000



Photo shown with optional custom finish. Standard cases are polished stainless steel front and sides.



Photo shown with optional top glass with shelf – Combi with optional RAL color front finish



Visit our website for more finishing options and RAL colors [www.oscartek.com](http://www.oscartek.com)

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 650.342.2400 | Fax: 650.342.7400  
www.oscartek.com





Discover the Art of Display...

Project Name: \_\_\_\_\_


Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

## OPTIMA - 34" H


MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500, OPTIMA 2000

### STANDARD PLAN VIEWS:


OPTIMA 1000

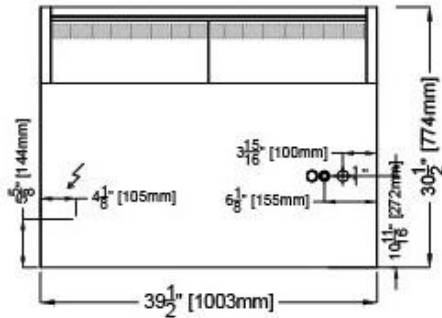


OPTIMA 1250

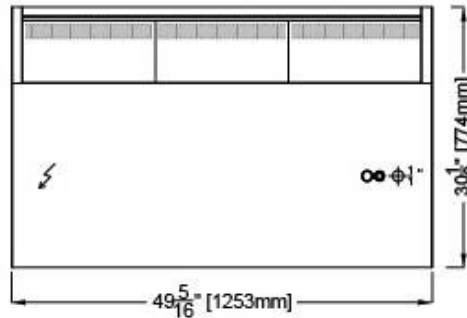

OPTIMA 1500

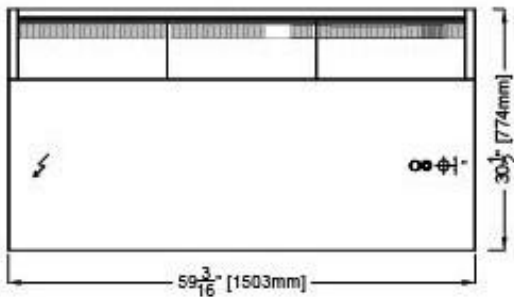

OPTIMA 2000 - 35" H

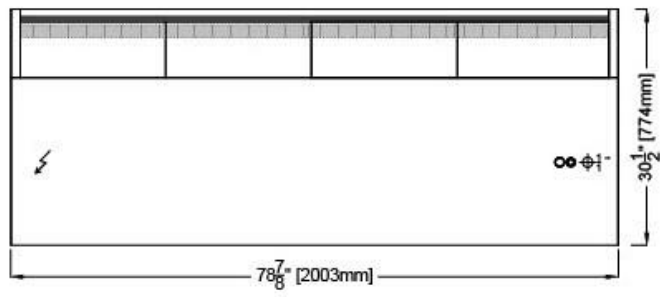

#### ELECTRICAL LEGEND

∞	REFRIGERATION LINES
φ 1/2"	DRAIN
⚡	POWER

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 650.342.2400 | Fax: 650.342.7400

www.oscartek.com






Project Name: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

## OPTIMA - 34" H


MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500, OPTIMA 2000

### STANDARD REAR ELEVATIONS:


OPTIMA 1000

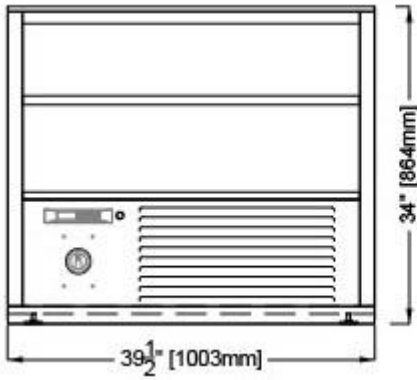


OPTIMA 1250

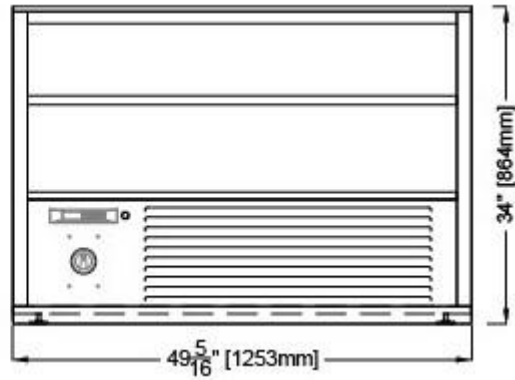

OPTIMA 1500

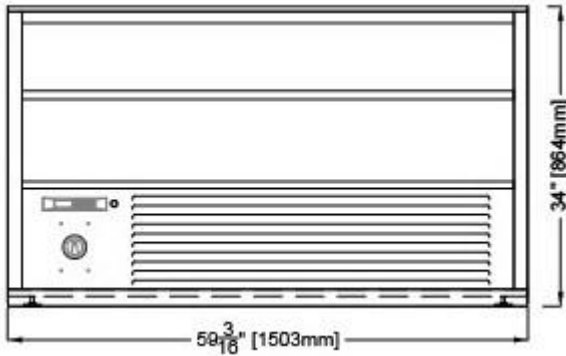

OPTIMA 2000 - 35" H

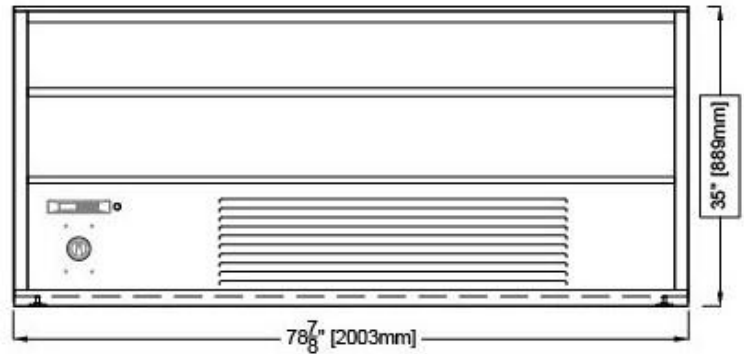

#### ELECTRICAL LEGEND

∞	REFRIGERATION LINES
⌀ 1"	DRAIN
⚡	POWER

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
 512 South Airport Blvd., South San Francisco, CA 94080  
 Tel: 650.342.2400 | Fax: 650.342.7400  
 www.oscartek.com




## OPTIMA - 34" H

MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500, OPTIMA 2000


### STANDARD: 30" D

### SECTION VIEW

#### OPTIMA 1000, OPTIMA 1250, OPTIMA 1500 – 34" H

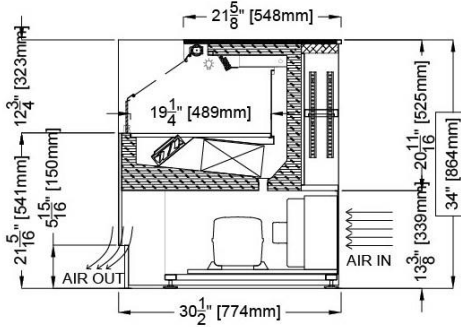


#### OPTIMA 2000 – 35" H

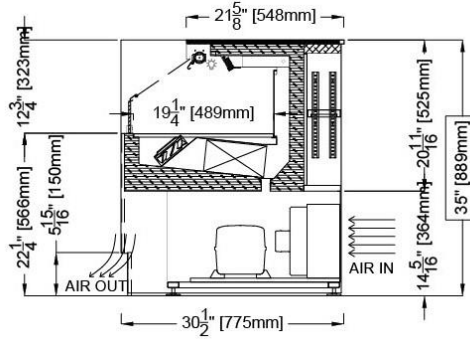


### OPTIONALS SECTION VIEWS


#### NARROW – 26" D

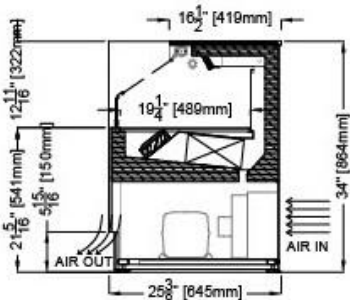


#### COMBI

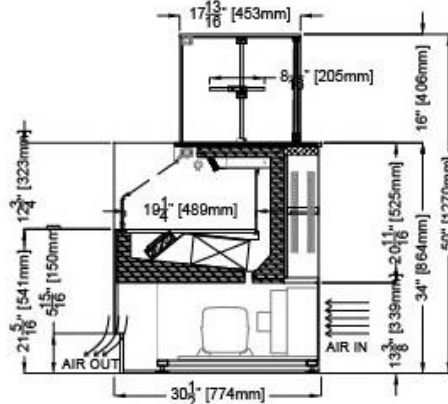


#### NIGHT SHUTTER

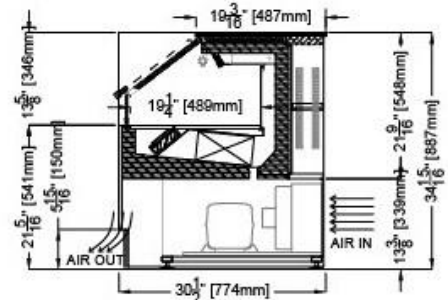

#### OPTIMA 2000 NARROW – 35" H

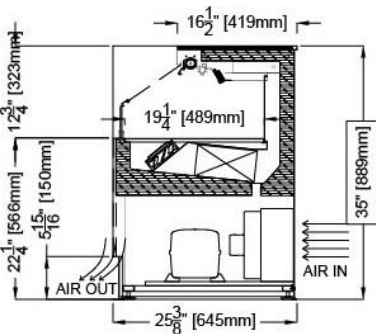

#### OPTIMA 2000 COMBI – 35" H

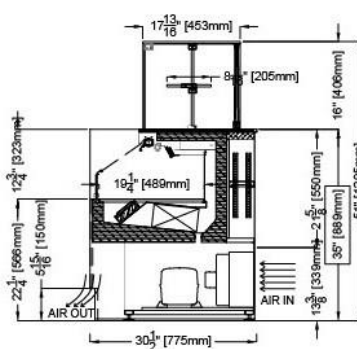

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.




**OPTIONAL: OPTIMA – 32-1/2”H**


**MODELS:** OPTIMA 1000, OPTIMA 1250, OPTIMA 1500, OPTIMA 2000

**OPTIONALS**  
**SECTION VIEWS**


**STANDARD 30”D W/ LEGS**

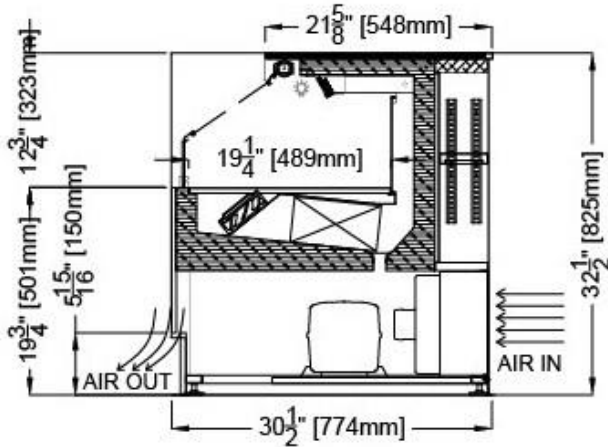


**STANDARD 30”D W/ CASTERS**

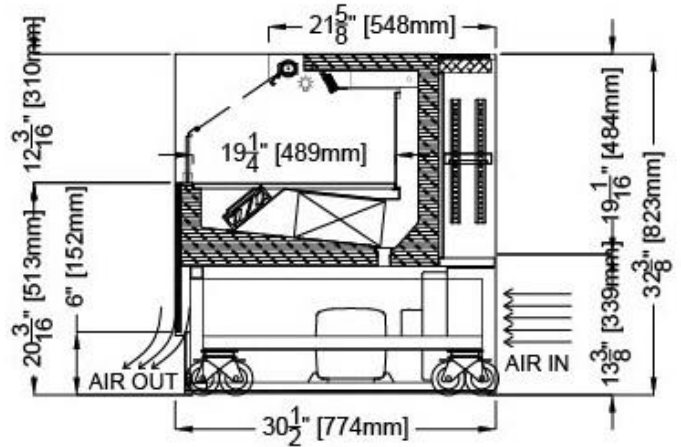

**NARROW 26”D W/ LEGS**

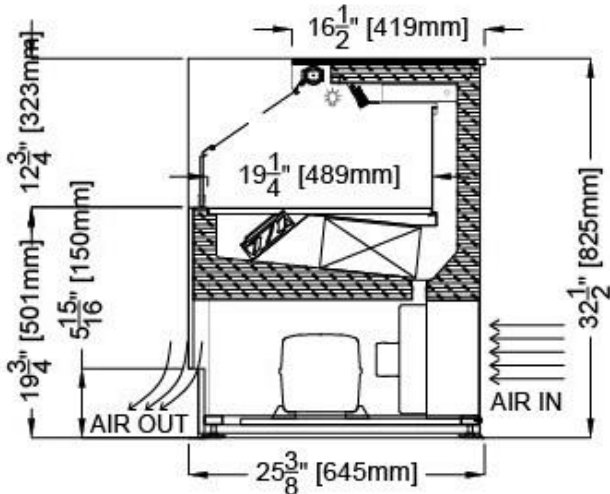

**NARROW 26”D W/ CASTERS**

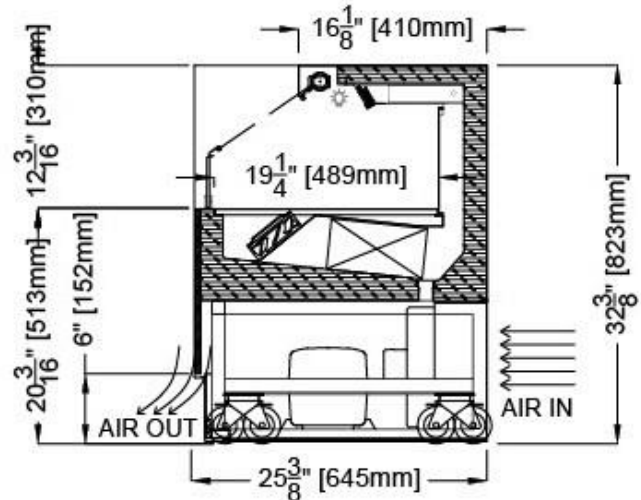


\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

**OPTIONAL: OPTIMA – 32-1/2”H**


**MODELS:** OPTIMA 1000, OPTIMA 1250, OPTIMA 1500, OPTIMA 2000

**SECTION VIEWS**

**COMBI W/ LEGS**

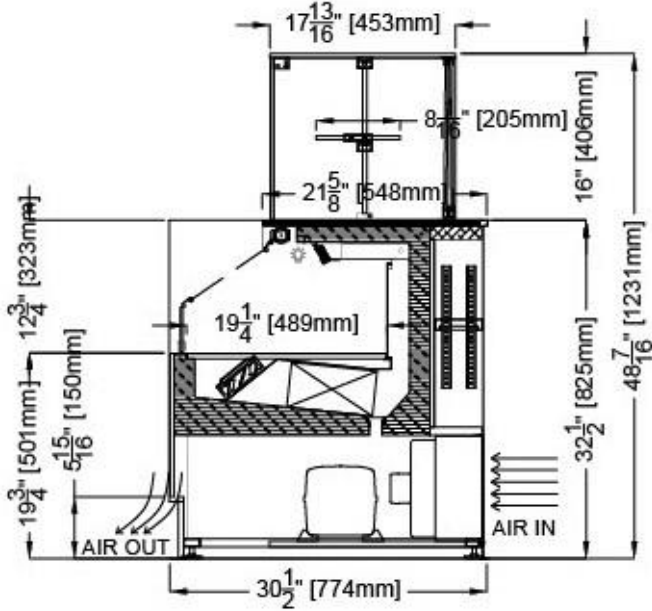

**COMBI W/ CASTERS**

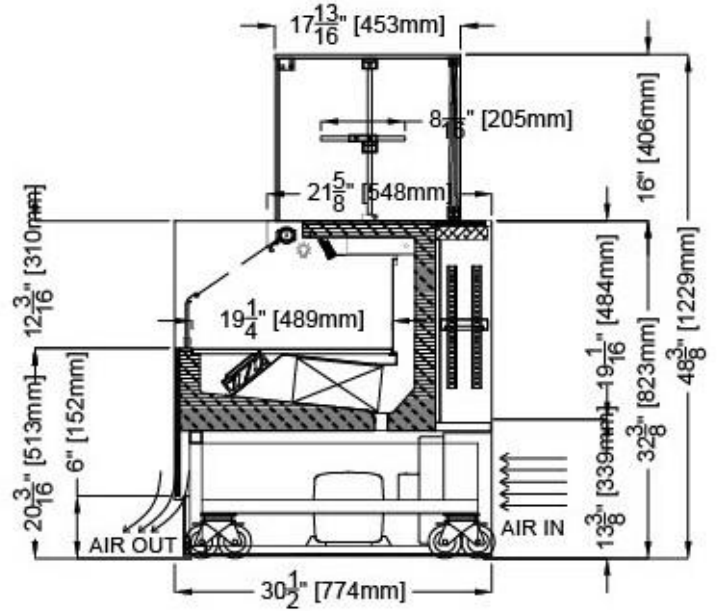

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.



Project Name: \_\_\_\_\_  
 Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

## OPTIMA - 34"H

MODELS: OPTIMA 1000, OPTIMA 1250, OPTIMA 1500, OPTIMA 2000

OPTIMA - SELF SERVE REFRIGERATION					
TECHNICAL FEATURES		MODELS			
		OPTIMA 1000 (MUROOP39F)	OPTIMA 1250 (MUROOP49F)	OPTIMA 1500 (MUROOP59F)	OPTIMA 2000
External Dimensions (L-D-H) Inches-MM	Inches MM	*39 1/2" - 30 1/2" - 34" *1003 - 775 - 864	*49 5/16" - 30 1/2" - 34" *1253 - 775 - 864	*59 3/16" - 30 1/2" - 34" *1503 - 775 - 864	*78 7/8" - 30 1/2" - 35" *2003 - 775 - 889
Crated Dimensions (L-D-H) Inches-MM	Inches MM	46" - 37" - 40" 1168 - 939 - 1016	55" - 37" - 40" 1397 - 939 - 1016	66" - 37" - 40" 1676 - 939 - 1016	86" - 37" - 41" 2184 - 939 - 1041
BTU's @ +14°F Evap Temperature	BTU'S	3600	4500	5100	6500
Electric Supply	(V/Ph/Hz)	208-220V/60Hz	208-220V/60Hz	208-220V/60Hz	208-220V/60Hz
Power Consumption	(W/A)	1500/7.5	1850/8.9	2000/10.5	2200/11.5
Operating Temperature	°F	40°F	40°F	40°F	40°F
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	1/2" Suction, 1/4" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	290	350	400	480
Crated Weights	Lb	370	430	480	560
<b>* DIMENSIONS ARE WITH POLISHED S/S SIDES</b>					
<b>NOTES:</b>					
<b>1) 85°F AMBIENT AND 55% RELATIVE HUMIDITY   2) FLOOR SINK RECOMMENDED ON THESE MODELS</b>					

\*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
 512 South Airport Blvd., South San Francisco, CA 94080  
 Tel: 650.342.2400 | Fax: 650.342.7400  
 www.oscartek.com

