



Discover the Art of Display...



Custom case photo shown with optional RAL color finish. Standard cases are unfinished front with stainless steel sides.

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)

Project Name: _____

Item #: _____ Quantity: _____

ROSA COMBI H1 & H2 REFRIGERATED TOP & BOTTOM SHOWCASE

ROSA COMBI H1 MODELS: 1000, 1300, 1500, 1700, 2000

ROSA COMBI H2 MODELS: 1000, 1300, 1500, 1700, 2000

STANDARD FEATURES

- **Rosa Combi H1: Self-contained. Refrigerated top and bottom**
- **Rosa Combi H2: Remote. Refrigerated top and bottom**
- Extra clear glass: front and top glasses with front air baffle
- Heated glass sides
- All tempered glass
- Diffused LED lighting 3000°K
- Sliding acrylic back doors
- High polished stainless steel interior
- Stainless steel lower interior foam tub
- Galvanized chassis structure
- Cases ship standard unfinished front and stainless steel sides

OPTIONS

- **Rosa Combi H1: Self-contained. Refrigerated top and bottom with switch control for refrigerated top to non-refrigerated top**
- **Rosa Combi H2: Remote. Refrigerated top and bottom with switch control for refrigerated top to non-refrigerated top**
- Available in 53 1/8"H with non-refrigerated shelf, self contained or remote
- Lift up top glass
- Work top perimeter (brushed s/s, corian, black HPL, granite)
- Remote condensing unit
- RAL color finish/wood laminate front and side panels
- Epoxy RAL color interior over stainless steel
- Unfinished panels to accept custom millwork by others
- Heated pan for evaporator
- Casters

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com




ROSA COMBI H1 & H2 REFRIGERATED TOP & BOTTOM


ROSA COMBI H1 MODELS: 1000, 1300, 1500, 1700, 2000

ROSA COMBI H2 MODELS: 1000, 1300, 1500, 1700, 2000


STANDARD: ROSA COMBI H1 (SELF-CONTAINED) PLAN VIEWS

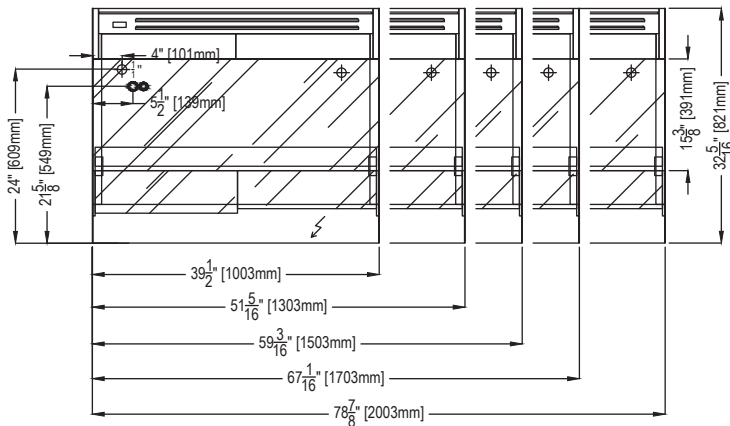


STANDARD: ROSA COMBI H2 (REMOTE) PLAN VIEWS

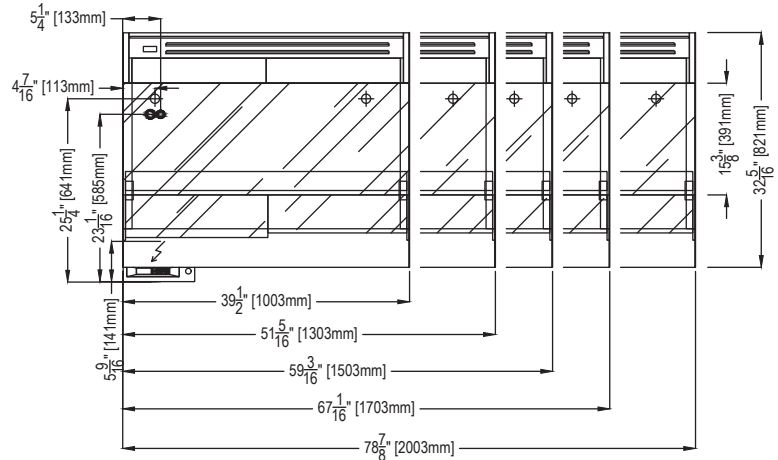

STANDARD: ROSA COMBI H1 (SELF-CONTAINED) REAR ELEVATIONS(OPERATOR SIDE)

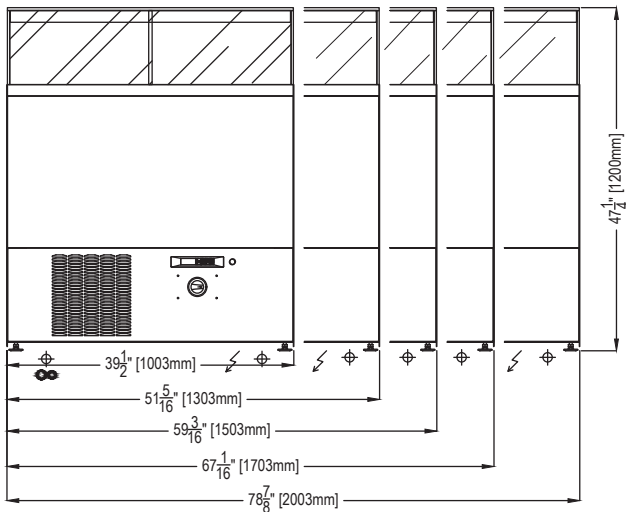

STANDARD: ROSA COMBI H2 (REMOTE) REAR ELEVATIONS(OPERATOR SIDE)

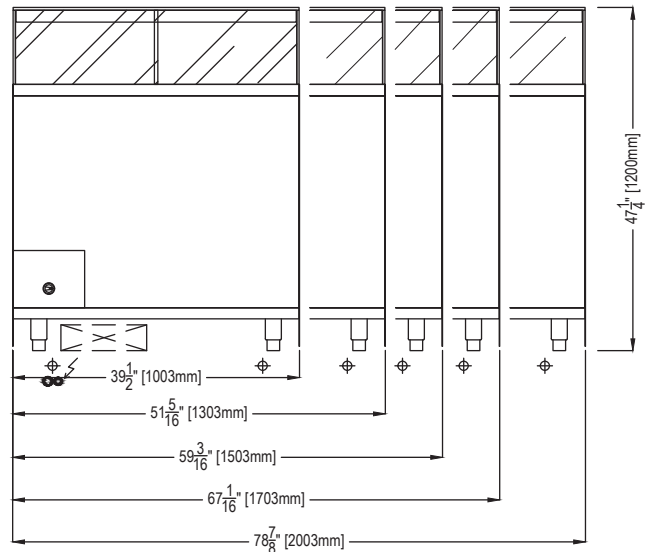

ELECTRICAL LEGEND

○	REFRIGERATION LINES
⊕ 1"	DRAIN
⚡	POWER

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com






Item #: _____ Quantity: _____

ROSA COMBI H2 MODELS: 1000, 1300, 1500, 1700, 2000


SECTION VIEWS

**OPTIONAL:
REFRIGERATED TOP & BOTTOM WITH
SWITCH CONTROL FOR REFRIGERATED TOP
TO NON-REFRIGERATED TOP**

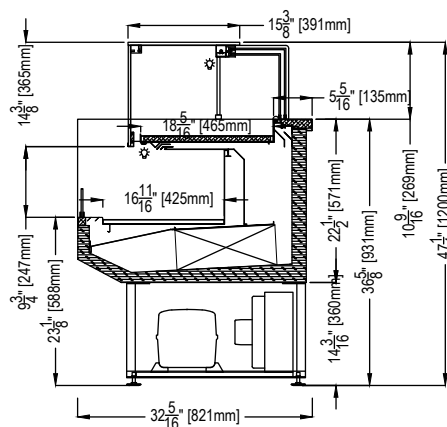

SECTION VIEWS

**OPTIONAL:
REFRIGERATED TOP & BOTTOM WITH SWITCH
CONTROL FOR REFRIGERATED TOP TO
NON-REFRIGERATED TOP**

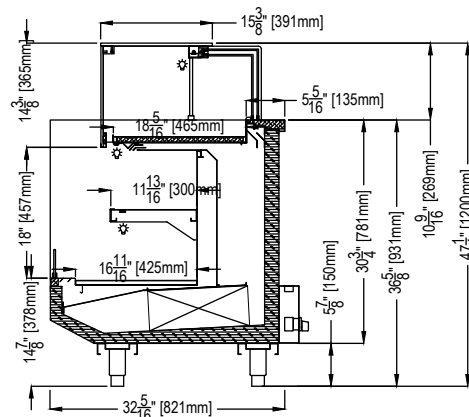

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



ROSA COMBI H1 & H2 REFRIGERATED TOP & BOTTOM



ROSA COMBI H1 MODELS: 1000, 1300, 1500, 1700, 2000

ROSA COMBI H2 MODELS: 1000, 1300, 1500, 1700, 2000

OPTIONAL: ROSA COMBI H1 (SELF-CONTAINED) 53 1/8" H WITH NON REFRIGERATED SHELF SECTION VIEWS

OPTIONAL:
REFRIGERATED TOP & BOTTOM



OPTIONAL:
REFRIGERATED TOP & BOTTOM WITH
SWITCH CONTROL FOR REFRIGERATED TOP
TO NON-REFRIGERATED TOP

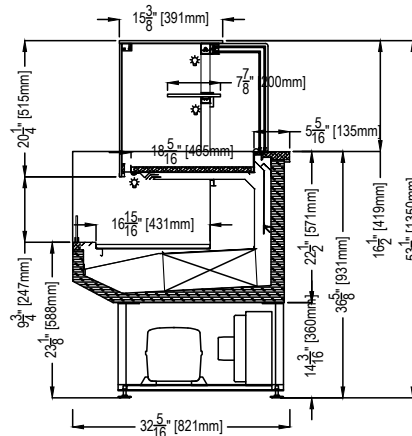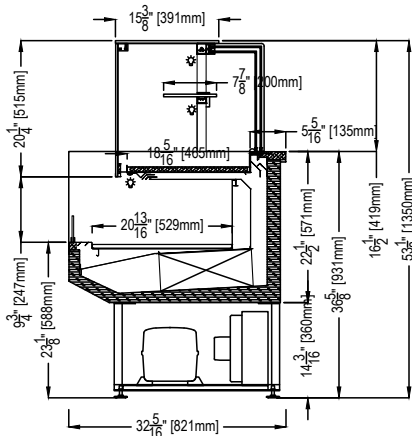

OPTIONAL: ROSA COMBI H2 (REMOTE) 53 1/8" H WITH NON REFRIGERATED SHELF SECTION VIEWS

OPTIONAL:
REFRIGERATED TOP & BOTTOM

OPTIONAL:
REFRIGERATED TOP & BOTTOM WITH
SWITCH CONTROL FOR REFRIGERATED TOP
TO NON-REFRIGERATED TOP

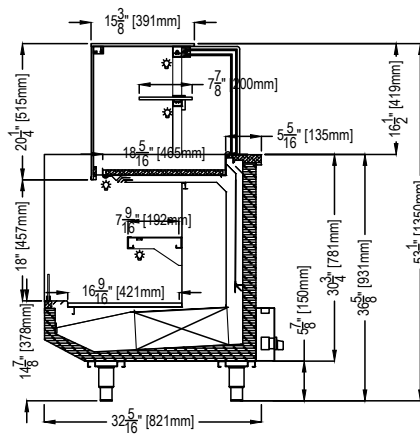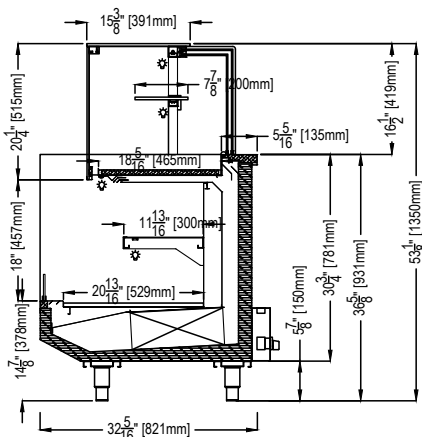

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

ROSA COMBI H1 & H2 REFRIGERATED TOP & BOTTOM SHOWCASE

ROSA COMBI H1 MODELS: 1000, 1300, 1500, 1700, 2000

ROSA COMBI H2 MODELS: 1000, 1300, 1500, 1700, 2000

ROSA COMBI H1 - REFRIGERATED TOP & BOTTOM (SELF CONTAINED)						
TECHNICAL FEATURES		MODELS				
		ROSA COMBI H1 1000 (RSCOMR43912H1)	ROSA COMBI H1 1300 (RSCOMR45112H1)	ROSA COMBI H1 1500 (RSCOMR45912H1)	ROSA COMBI H1 1700 (RSCOMR46712H1)	ROSA COMBI H1 2000 (RSCOMR47812H1)
External Dimensions (L-D-H) Inches-MM	Inches MM	*39 1/2" - 32 5/16" - 47 1/4" *1003 - 821 - 1200	*51 5/16" - 32 5/16" - 47 1/4" *1303 - 821 - 1200	*59 3/16" - 32 5/16" - 47 1/4" *1503 - 821 - 1200	*67 1/16" - 32 5/16" - 47 1/4" *1703 - 821 - 1200	*78 7/8" - 32 5/16" - 47 1/4" *2003 - 821 - 1200
Crated Dimensions (L-D-H) Inches-MM	Inches MM	54" - 50" - 70" 1380-1260-1780	70" - 50" - 70" 1780-1260-1780	70" - 50" - 70" 1780-1260-1780	70" - 50" - 70" 1780-1260-1780	88" - 50" - 70" 2230-1260-1780
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Top & Bottom Display	Top & Bottom Display	Top & Bottom Display	Top & Bottom Display	Top & Bottom Display
Operating Temperature	°F	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +14°F Evap Temperature	BTU'S	3800	4400	4900	5200	5300
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	1250/6.5	1350/6.8	1550/7.5	1750/8.8	1850/9.1
Defrost	Mode/Type	Electric	Electric	Electric	Electric	Electric
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	1/2" Suction, 1/4" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	290	310	340	360	380
Crated Weights	Lb	660	748	770	792	1065

*DIMENSIONS ARE WITH POLISHED S/S SIDES

ROSA COMBI H2 - REFRIGERATED TOP & BOTTOM (REMOTE)						
TECHNICAL FEATURES		MODELS				
		ROSA COMBI H2 1000 (RSCOMR43912H2)	ROSA COMBI H2 1300 (RSCOMR45112H2)	ROSA COMBI H2 1500 (RSCOMR45912H2)	ROSA COMBI H2 1700 (RSCOMR46712H2)	ROSA COMBI H2 2000 (RSCOMR47812H2)
External Dimensions (L-D-H) Inches-MM	Inches MM	*39 1/2" - 32 5/16" - 47 1/4" *1003 - 821 - 1200	*51 5/16" - 32 5/16" - 47 1/4" *1303 - 821 - 1200	*59 3/16" - 32 5/16" - 47 1/4" *1503 - 821 - 1200	*67 1/16" - 32 5/16" - 47 1/4" *1703 - 821 - 1200	*78 7/8" - 32 5/16" - 47 1/4" *2003 - 821 - 1200
Crated Dimensions (L-D-H) Inches-MM	Inches MM	54" - 50" - 70" 1380-1260-1780	70" - 50" - 70" 1780-1260-1780	70" - 50" - 70" 1780-1260-1780	70" - 50" - 70" 1780-1260-1780	88" - 50" - 70" 2230-1260-1780
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Top & Bottom Display	Top & Bottom Display	Top & Bottom Display	Top & Bottom Display	Top & Bottom Display
Operating Temperature	°F	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +14°F Evap Temperature	BTU'S	4300	4700	5200	5700	6000
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	1350/6.8	1550/7.5	1750/8.8	1850/9.1	2000/10.5
Defrost	Mode/Type	Electric	Electric	Electric	Electric	Electric
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	350	395	440	510	550
Crated Weights	Lb	660	748	770	792	1065

*DIMENSIONS ARE WITH POLISHED S/S SIDES

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

