



Discover the Art of Display...



Photo shown with optional inclined front and optional RAL color finish. Standard cases are unfinished front and stainless steel sides.

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)

Project Name: _____

Item #: _____ Quantity: _____

ROSA COMBI M1 REFRIGERATED TOP & BOTTOM SHOWCASE

MODELS: ROSA COMBI M1 1000, ROSA COMBI M1 1300, ROSA COMBI M1 1500, ROSA COMBI M1 1700, ROSA COMBI M1 2000

STANDARD FEATURES

- Rosa Combi M1: refrigerated top and bottom
- Extra clear glass: front and top glasses with front air baffle
- Heated glass sides
- All tempered glass
- Diffused LED lighting 3000°K
- Sliding acrylic back doors
- High polished stainless steel interior
- Stainless steel lower interior foam tub
- Galvanized chassis structure
- Rear ventilation
- Cases ship standard unfinished front and stainless steel sides

OPTIONS

- Available in 53 1/8"H with non-refrigerated shelf
- Lift up top glass
- Remote condensing unit
- Work top perimeter (brushed s/s, corian, black HPL, granite)
- RAL color finish/wood laminate front and side panels
- Epoxy RAL color interior over stainless steel
- Unfinished panels to accept custom millwork by others
- Heated pan for evaporator
- Casters

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*


OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



ROSA COMBI M1 REFRIGERATED TOP & BOTTOM SHOWCASE

MODELS: ROSA COMBI M1 1000, ROSA COMBI M1 1300, ROSA COMBI M1 1500, ROSA COMBI M1 1700, ROSA COMBI M1 2000


ROSA COMBI M1 PLAN VIEWS

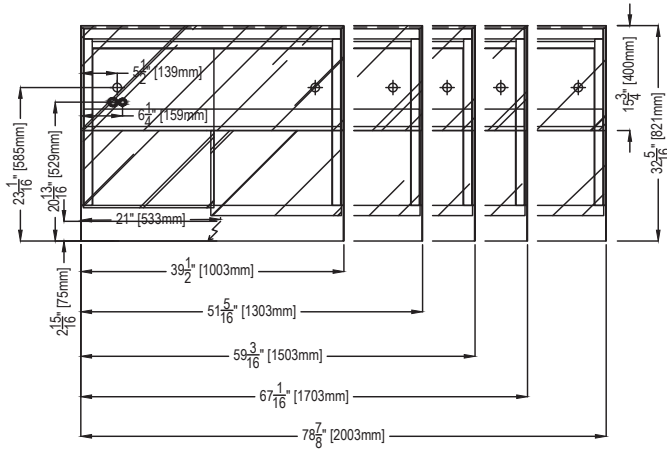


ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

ROSA COMBI M1 SECTION VIEWS


STANDARD: 47 1/4" H

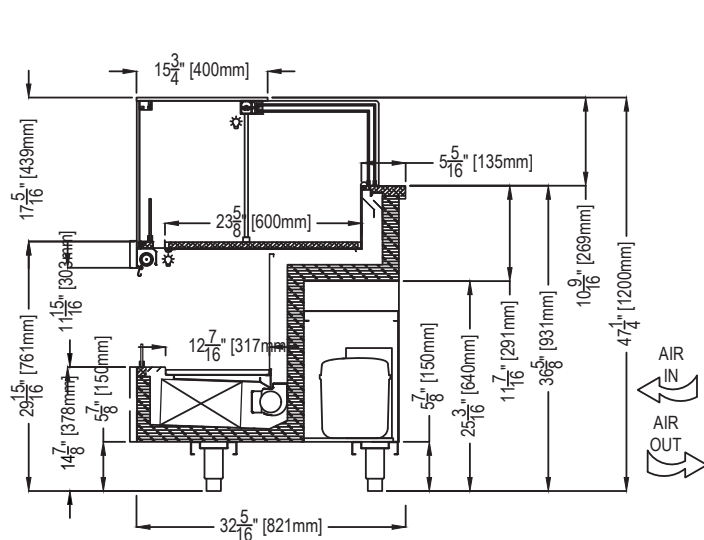

ROSA COMBI M1 REAR ELEVATIONS(OPERATOR SIDE)

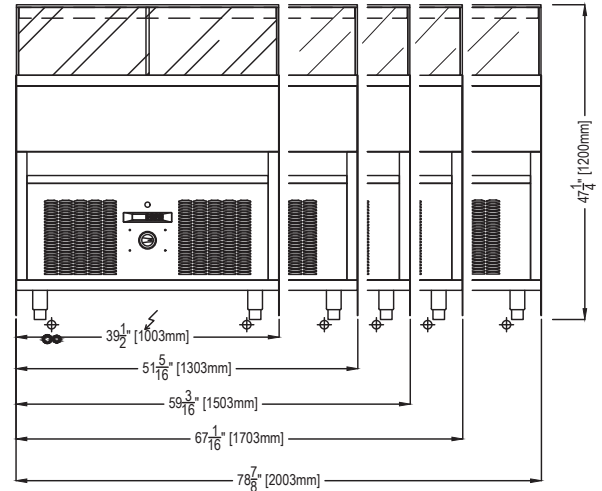

OPTIONAL: AVAILABLE IN 53 1/8" H WITH NON- REFRIGERATED SHELF

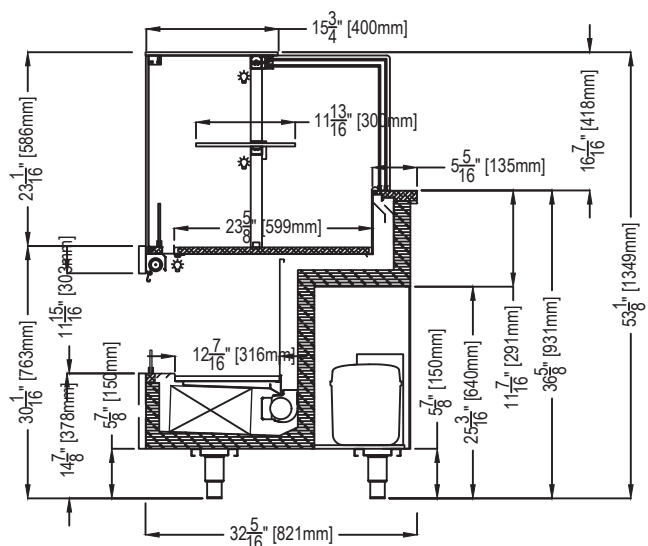

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.



Discover the Art of Display...

Project Name: _____

Item #: _____ Quantity: _____

ROSA COMBI M1 REFRIGERATED TOP & BOTTOM SHOWCASE

MODELS: ROSA COMBI M1 1000, ROSA COMBI M1 1300, ROSA COMBI M1 1500, ROSA COMBI M1 1700, ROSA COMBI M1 2000

ROSA COMBI M1 - REFRIGERATED TOP & BOTTOM (SELF CONTAINED)						
TECHNICAL FEATURES		MODELS				
		ROSA COMBI M1 1000 (RSCOMR43912M1)	ROSA COMBI M1 1300 (RSCOMR45112M1)	ROSA COMBI M1 1500 (RSCOMR45912M1)	ROSA COMBI M1 1700 (RSCOMR46712M1)	ROSA COMBI M1 2000 (RSCOMR47812M1)
External Dimensions (L-D-H) Inches- MM	Inches MM	*39 1/2" - 32 5/16" - 47 1/4" *1003 - 821 - 1200	*51 5/16" - 32 5/16" - 47 1/4" *1303 - 821 - 1200	*59 3/16" - 32 5/16" - 47 1/4" *1503 - 821 - 1200	*67 1/16" - 32 5/16" - 47 1/4" *1703 - 821 - 1200	*78 7/8" - 32 5/16" - 47 1/4" *2003 - 821 - 1200
Crated Dimensions (L-D-H) Inches- MM	Inches MM	54" - 50" - 70" 1380-1260-1780	70" - 50" - 70" 1780-1260-1780	70" - 50" - 70" 1780-1260-1780	70" - 50" - 70" 1780-1260-1780	88" - 50" - 70" 2230-1260-1780
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Top & Bottom Display	Top & Bottom Display	Top & Bottom Display	Top & Bottom Display	Top & Bottom Display
Operating Temperature	°F	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +10°F Evap Temperature	BTU'S	4300	4700	5200	5700	6000
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	1350/6.8	1550/7.5	1750/8.8	1850/9.1	2000/10.5
Defrost	Mode/Type	Electric	Electric	Electric	Electric	Electric
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	360	390	450	530	580
Crated Weights	Lb	660	748	770	792	1065

*DIMENSIONS ARE WITH POLISHED S/S SIDES

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

