



Photo shown with optional finish. Standard cases are unfinished front with stainless steel sides

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)

ROSA PRO FISH SHOWCASE

MODELS: ROSA PRO F900, F1000, F1300, F1500, F1700, F2000, F2100, F2600, F3000, FA90SQ, FA90C

STANDARD FEATURES

- Extra clear glass: front, top, and sides glasses
- Diffused LED lighting 3000°K
- Sliding acrylic back doors
- Stainless steel cold wall static cooling insulated bin to retain ice
- Insulated stainless steel interior AISI 316 anti-corrosion
- Floor sink required
- All tempered glass
- Cases ship standard unfinished front and stainless steel sides

OPTIONS

- Available in 53 1/8"H with non-refrigerated shelf
- Narrow depth 25 7/16"D
- Lift up top glass
- Work top perimeter (brushed s/s, corian, black HPL, granite)
- Remote condensing unit
- RAL color finish/wood laminate front and side panels
- Unfinished panels to accept custom millwork by others
- Casters

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




ROSA PRO FISH

MODELS: ROSA PRO F900, F1000, F1300, F1500, F1700, F2000, F2100, F2600, F3000, FA90SQ, FA90C

STANDARD: ROSA PRO FISH


PLAN VIEWS

ALL ROSA PRO FISH LINEAR MODELS

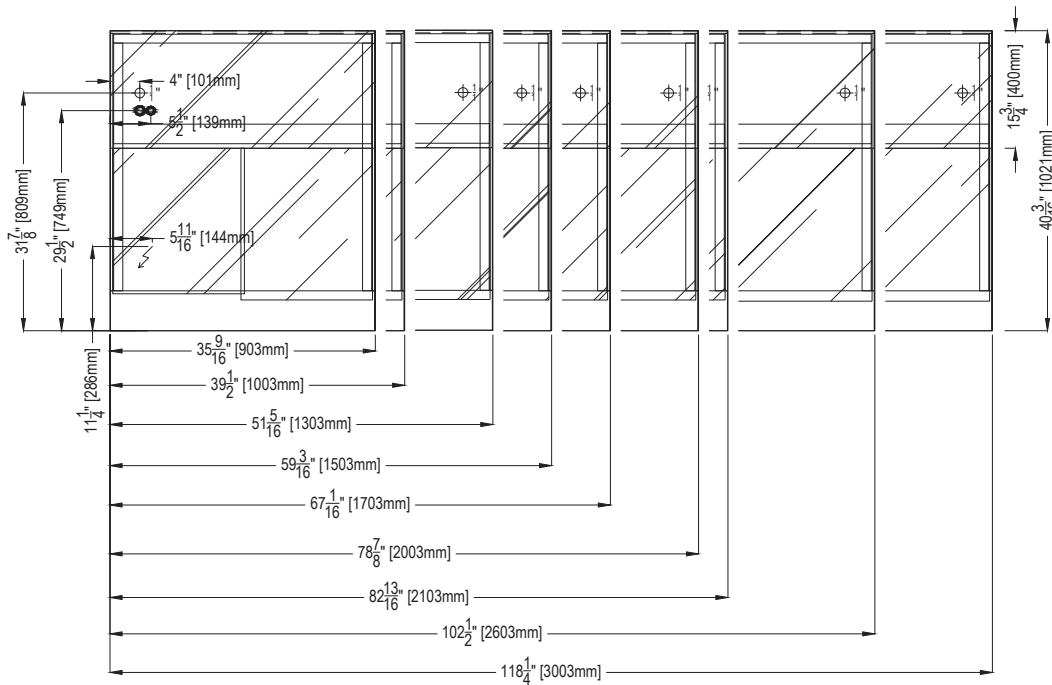


ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

ROSA PRO FA90SQ

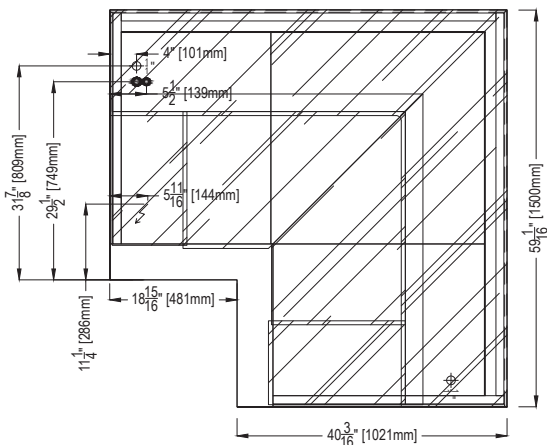

ROSA PRO FA90C

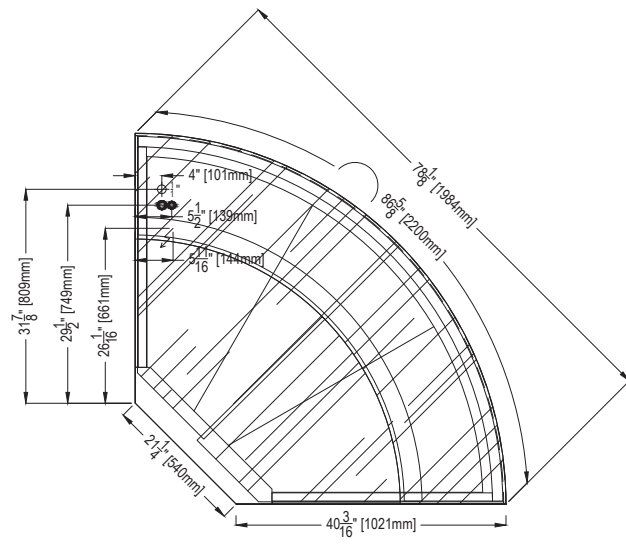

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
 512 South Airport Blvd., South San Francisco, CA 94080
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com





Project Name: _____

Item #: _____ Quantity: _____

Discover the Art of Display...


ROSA PRO FISH

MODELS: ROSA PRO F900, F1000, F1300, F1500, F1700, F2000, F2100, F2600, F3000, FA90SQ, FA90C


STANDARD: ROSA PRO FISH

REAR ELEVATIONS(OPERATOR SIDE)


ALL ROSA PRO FISH LINEAR MODELS

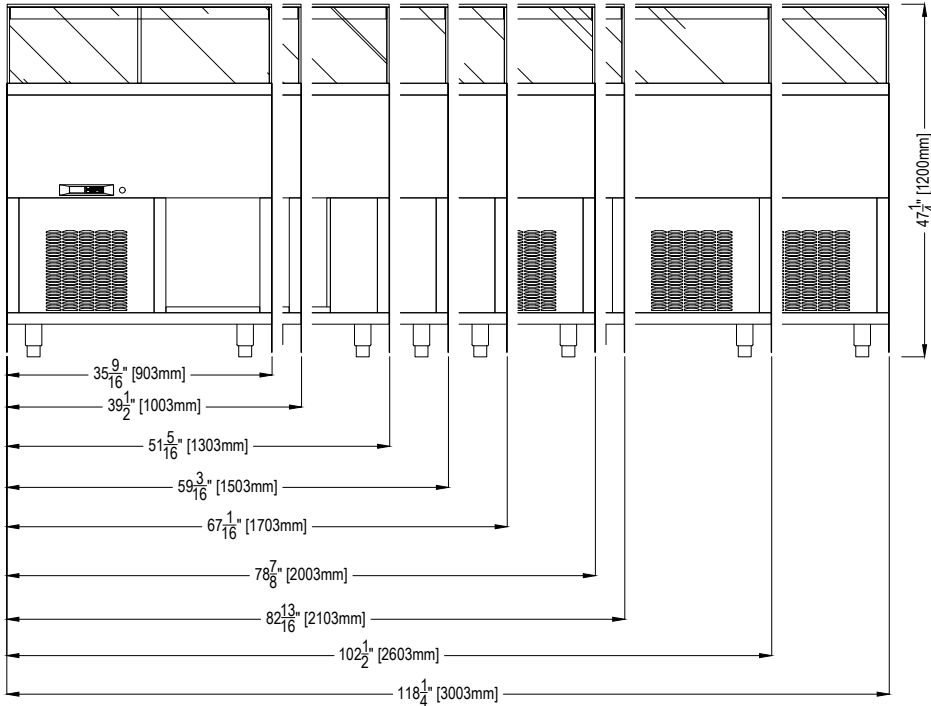

ROSA PRO FA90SQ

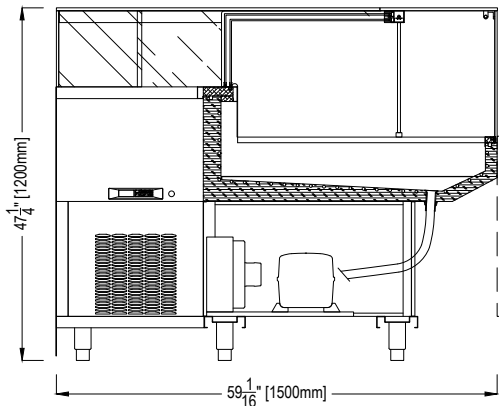

ROSA PRO FA90C

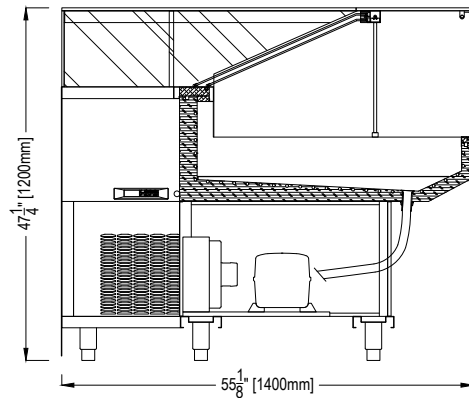

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




ROSA PRO FISH

MODELS: ROSA PRO F900, F1000, F1300, F1500, F1700, F2000, F2100, F2600, F3000, FA90SQ, FA90C


STANDARD: ROSA PRO FISH

SECTION VIEWS


ALL ROSA PRO FISH LINEAR MODELS
EXCEPT FOR ROSA F3000

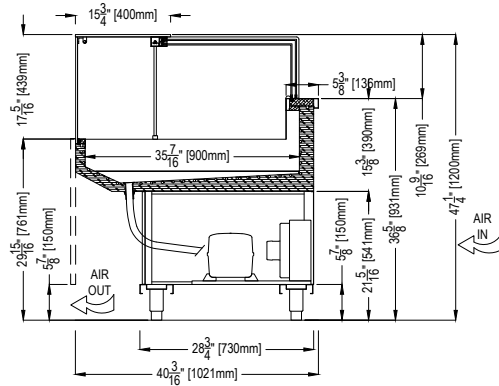

ROSA PRO F3000

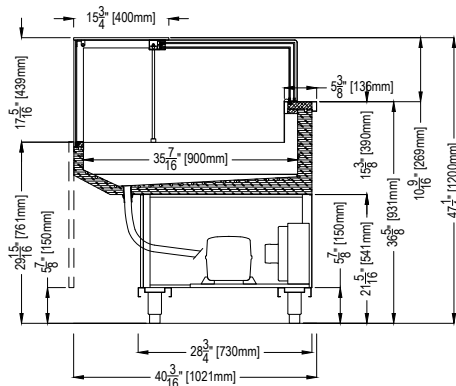


ROSA PRO FA90C

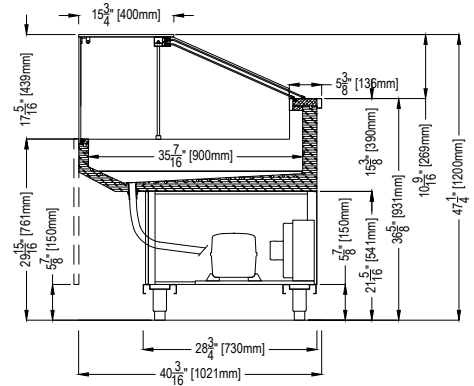

OPTIONAL: ROSA PRO FISH

SECTION VIEWS

ROSA PRO FISH - AVAILABLE IN 53 1/8\"H WITH
NON-REFRIDGERATED SHELF

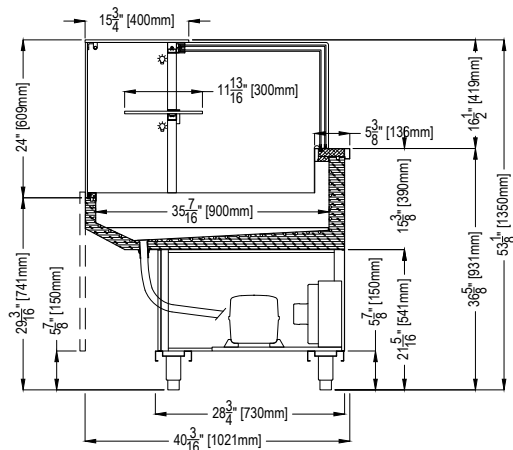

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

ROSA PRO FISH

MODELS: ROSA PRO F900, F1000, F1300, F1500, F1700, F2000, F2100, F2600, F3000, FA90SQ, FA90C

ROSA PRO FISH						
TECHNICAL FEATURES		MODELS				
		ROSA PRO F900	ROSA PRO F1000 (ROSAPFR43912)	ROSA PRO F1300	ROSA PRO F1500 (ROSAPFR45912)	ROSA PRO F1700
External Dimensions (L-D-H)	Inches	*35 9/16" - 40 3/16" - 47 1/4"	*39 1/2" - 40 3/16" - 47 1/4"	*51 5/16" - 40 3/16" - 47 1/4"	*59 3/16" - 40 3/16" - 47 1/4"	*67 1/16" - 40 3/16" - 47 1/4"
Inches-MM	MM	*903 - 1021 - 1200	*1003 - 1021 - 1200	*1303 - 1021 - 1200	*1503 - 1021 - 1200	*1703 - 1021 - 1200
Inches-MM	MM	1380-1260-1780	1380-1260-1780	1780-1260-1780	1780-1260-1780	1780-1260-1780
Operating Temperature	°F	36°F to 40°F	36°F to 40°F	36°F to 40°F	36°F to 40°F	36°F to 40°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
Temperature	BTU's	1500	1900	2400	2500	3100
Electric Supply	(V/Ph/Hz)	115/1/60	115/1/60	115/1/60	115/1/60	115/1/60
Power Consumption	(W/A)	550/5.0	600/5.7	650/6.0	900/8.5	1300/10.0
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	3/8" Suction, 1/4" Liquid	3/8" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid
Net Weights	Lb	230	250	280	300	340
Crated Weights	Lb	660	660	748	770	792

*DIMENSIONS ARE WITH POLISHED S/S SIDES

ROSA PRO FISH					
TECHNICAL FEATURES		MODELS			
		ROSA PRO F2000 (ROSAPFR47912)	ROSA PRO F2100	ROSA PRO F2600	ROSA PRO F3000
External Dimensions (L-D-H)	Inches	*78 7/8" - 40 3/16" - 47 1/4"	*82 13/16" - 40 3/16" - 47 1/4"	*102 1/2" - 40 3/16" - 47 1/4"	*118 1/4" - 40 3/16" - 47 1/4"
Inches-MM	MM	*2003 - 1021 - 1200	*2103 - 1021 - 1200	*2603 - 1021 - 1200	*3003 - 1021 - 1200
Inches-MM	MM	2230-1260-1780	2230-1260-1780	2768 - 1193 - 1400	3175 - 1193 - 1400
Operating Temperature	°F	36°F to 40°F	36°F to 40°F	36°F to 40°F	36°F to 40°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
Temperature	BTU's	3200	3600	4200	4500
Electric Supply	(V/Ph/Hz)	115/1/60	115/1/60	115/1/60	115/1/60
Power Consumption	(W/A)	1200/11.4	1300/12.0	1500/12.2	1650/13.0
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	380	400	480	500
Crated Weights	Lb	1065	1087	1110	1132

*DIMENSIONS ARE WITH POLISHED S/S SIDES

ROSA PRO FISH			
TECHNICAL FEATURES		MODELS	
		ROSA PRO FA90SQ (ROSAPFR4AP9012)	ROSA PRO FA90C
Inches-MM	MM	*1503 - 1021 - 1200	*1984 - 1021 - 1200
Inches-MM	MM	1780 - 1780 - 1780	1780 - 1780 - 1780
Operating Temperature	°F	36°F to 40°F	36°F to 40°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic
Temperature	BTU's	4500	4800
Electric Supply	(V/Ph/Hz)	115/1/60	115/1/60
Power Consumption	(W/A)	1650/13.0	1700/13.4
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	440	440
Crated Weights	Lb	990	990

*DIMENSIONS ARE WITH POLISHED S/S SIDES

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

