



Discover the Art of Display...



Photo shown with optional front finish and with optional G1 glass top. Standard cases are unfinished front with stainless steel sides.

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)

Project Name: _____

Item #: _____ Quantity: _____

ROSA PRO HOT SHOWCASE

CS-DRY MODELS: ROSA PRO CS1150, CS1500, CS2150

CBM-BAIN MARIE MODELS: ROSA PRO CBM1150, CBM1500, CBM2150

STANDARD FEATURES

- Extra clear glass: front, top, and sides glasses
- Heat lamp
- Stainless steel lower interior foam tub
- Galvanized chassis structure
- All tempered glass
- CS - dry
- CBM - bain marie
- Cases ship standard unfinished front and stainless steel sides

OPTIONS

- Available in 53 1/8"H with shelf
- Lift up top glass
- Work top perimeter (brushed s/s, corian, black HPL, granite)
- Stainless steel step shelf
- RAL color finish/wood laminate front and side panels
- Epoxy RAL color interior over stainless steel
- Unfinished panels to accept custom millwork by others
- Casters

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



ROSA PRO HOT




CS-DRY MODELS: ROSA PRO CS1150, CS1500, CS2150

CBM-BAIN MARIE MODELS: ROSA PRO CBM1150, CBM1500, CBM2150

ROSA PRO HOT: CS-DRY


PLAN VIEWS

ELECTRICAL LEGEND	
	POWER

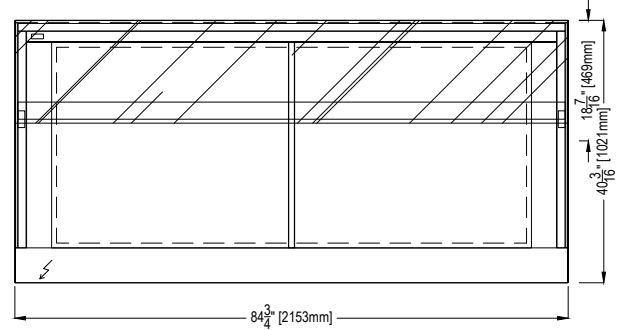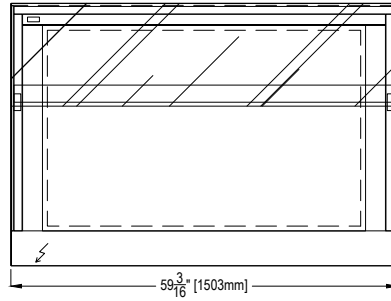

ROSA PRO HOT: CS-DRY


REAR ELEVATIONS (OPERATOR SIDE)

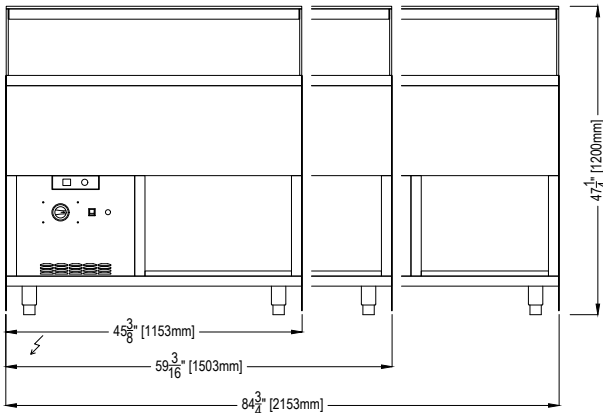


ROSA PRO HOT: CS-DRY

SECTION VIEWS

**STANDARD: ROSA PRO HOT
CS-DRY 47-1/4" H**

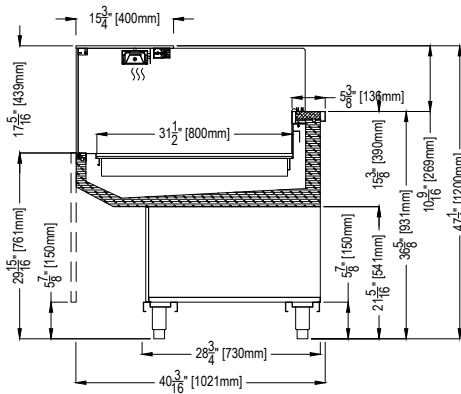

**OPTIONAL: ROSA PRO HOT
CS-DRY AVAILABLE IN 53 1/8" H**

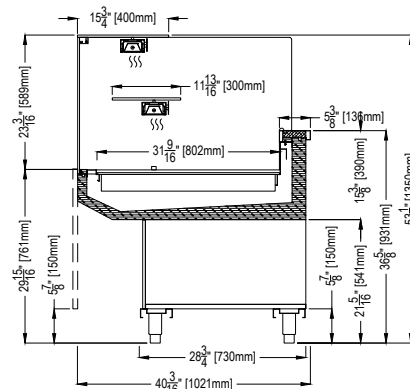

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com



ROSA PRO HOT

CS-DRY MODELS: ROSA PRO CS1150, CS1500, CS2150




CBM-BAIN MARIE MODELS: ROSA PRO CBM1150, CBM1500, CBM2150

ROSA PRO HOT: CBM-BAIN MARIE

PLAN VIEWS


ELECTRICAL LEGEND

⚡ POWER

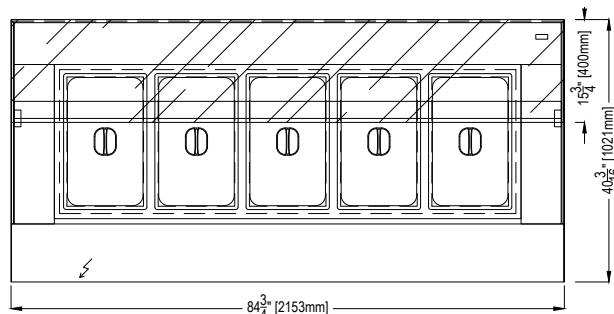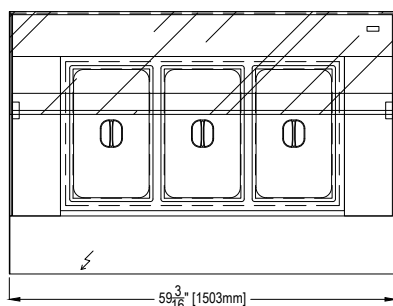

ROSA PRO HOT: CBM-BAIN MARIE


REAR ELEVATIONS (OPERATOR SIDE)

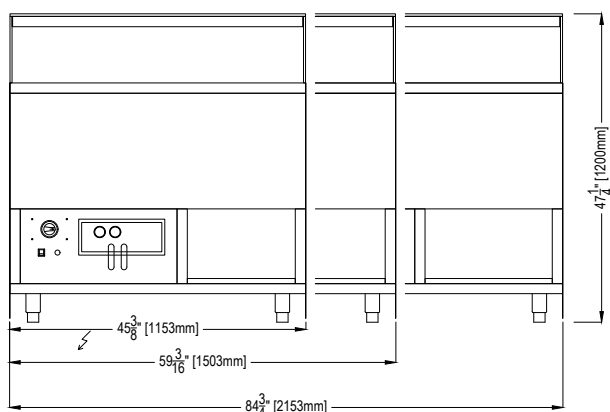


ROSA PRO HOT: CBM-BAIN MARIE

SECTION VIEWS

STANDARD: ROSA PRO HOT
CBM BAIN MARIE 47-1/4" H

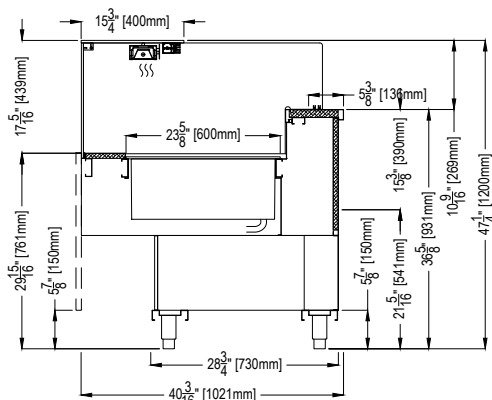

OPTIONAL: ROSA PRO HOT
CBM-BAIN MARIE AVAILABLE IN 53 1/8" H

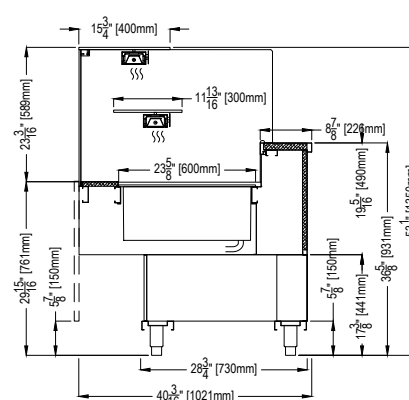

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com



Discover the Art of Display...

Project Name: _____

Item #: _____ Quantity: _____

ROSA PRO HOT

CS-DRY MODELS: ROSA PRO CS1150, CS1500, CS2150

CBM-BAIN MARIE MODELS: ROSA PRO CBM1150, CBM1500, CBM2150

ROSA PRO HOT (CS-DRY)				
TECHNICAL FEATURES		MODELS		
		ROSA PRO CS1150 (ROSAPCSR44512)	ROSA PRO CS1500 (ROSAPCSR45912)	ROSA PRO CS2150 (ROSAPCSR48512)
External Dimensions (L-D-H) Inches-MM	Inches MM	*45 3/8" - 40 3/16" - 47 1/4" *1153 - 1021 - 1200	*59 3/16" - 40 3/16" - 47 1/4" *1503 - 1021 - 1200	*84 3/4" - 40 3/16" - 47 1/4" *2153 - 1021 - 1200
Crated Dimensions (L-D-H) Inches-MM	Inches MM	54" - 50" - 70" 1380-1260-1780	70"- 50 - 70" 1780-1260-1780	88"- 50 - 70" 2230-1260-1780
Electric Supply**	(V/Ph/Hz)	(2) 208-220/1/60	(2) 208-220/1/60	(2) 208-220/1/60
Power Consumption Direct Connection**	HEAT LAMP (V/W/A) HOT PLATE (V/A)	208-220/620/3.5 120/9.3 - NEMA 5-15P	208-220/900/4.2 120/11.9 - NEMA 5-15P	208-220/1200/6.1 208/10.0- NEMA 5-15P
Operating Temperature	°F	up to180°F	up to180°F	up to180°F
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH
Net Weights	Lb	220	260	360
Crated Weights	Lb	682	792	1065

*DIMENSIONS WITH POLISHED S/S SIDES

**REQUIRES 2 INDEPENDENT ELECTRIC SUPPLY

ROSA PRO HOT (CBM- BAIN MARIE)				
TECHNICAL FEATURES		MODELS		
		ROSA PRO CBM1150 (ROSAPBMR44512)	ROSA PRO CBM1500 (ROSAPBMR45912)	ROSA PRO CBM2150 (ROSAPBMR48512)
External Dimensions (L-D-H) Inches-MM	Inches MM	*45 3/8" - 40 3/16" - 47 1/4" *1153 - 1021 - 1200	*59 3/16" - 40 3/16" - 47 1/4" *1503 - 1021 - 1200	*84 3/4" - 40 3/16" - 47 1/4" *2153 - 1021 - 1200
Crated Dimensions (L-D-H) Inches-MM	Inches MM	54" - 50" - 70" 1380-1260-1780	70"- 50 - 70" 1780-1260-1780	88"- 50 - 70" 2230-1260-1780
Electric Supply**	(V/Ph/Hz)	(2) 208-220/1/60	(2) 208-220/1/60	(2) 208-220/1/60
Power Consumption Direct Connection**	HEAT LAMP (V/W/A) BAIN MARIE (V/PH/A)	208-220/1530/7.2 ***208-220/1/11.6 - 6-15P (OPTIONAL PLUG)	208-220/2030/9.5 ***208-220/1/17.4 - 6-30P (OPTIONAL PLUG)	208-220/3100/14.5 ***208-220/1/28.9 - NEMA-6-50P (OPTIONAL PLUG)
Operating Temperature	°F	up to180°F	up to180°F	up to180°F
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH
Net Weights	Lb	220	260	360
Crated Weights	Lb	682	792	1065

*DIMENSIONS WITH POLISHED S/S SIDES

**REQUIRES 2 INDEPENDENT ELECTRIC SUPPLY

***AVAILABLE IN 3 PHASE

NOTE: CBM-BAIN MARIE: DRAIN SIZE FOR INDIVIDUAL WELL 3/4"

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

