



Sushi display at Hyatt custom finish

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)

Project Name: _____

Item #: _____ Quantity: _____

SUSHI

SELF CONTAINED MODELS: SUSHI 1000SC, 1250SC, 1500SC, 1700SC

REMOTE CONDENSING UNIT MODELS: SUSHI 1000R, 1250R, 1500R, 1700R, 2000R, A90R

STANDARD FEATURES

- Molded heat-insulated tank coated by stainless steel
- Static refrigeration with coil into the plane + upper static evaporator in polish tube
- Thermostatic valve
- Stainless steel trays in polished finished
- Tempered glass box
- Diffused LED lighting 3000°K
- Sliding acrylic back doors
- Digital control panel
- LCD temperature display
- Models available in Self contained and Remote Condensing Unit By Others
- Polished stainless steel interior and exterior

OPTIONS

- Remote Condensing Unit
- Sliding glass back doors
- Epoxy RAL color interior and exterior
- Brushed stainless steel interior and exterior
- Natural brass aged with acid LO10NBA exterior only


**Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK®
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




SELF CONTAINED MODELS: SUSHI 1000SC, 1250SC, 1500SC, 1700SC
REMOTE CONDENSING UNIT MODELS: SUSHI 1000R, 1250R, 1500R, 1700R, 2000R, A90R

SUSHI - SELF CONTAINED **PLAN VIEWS**

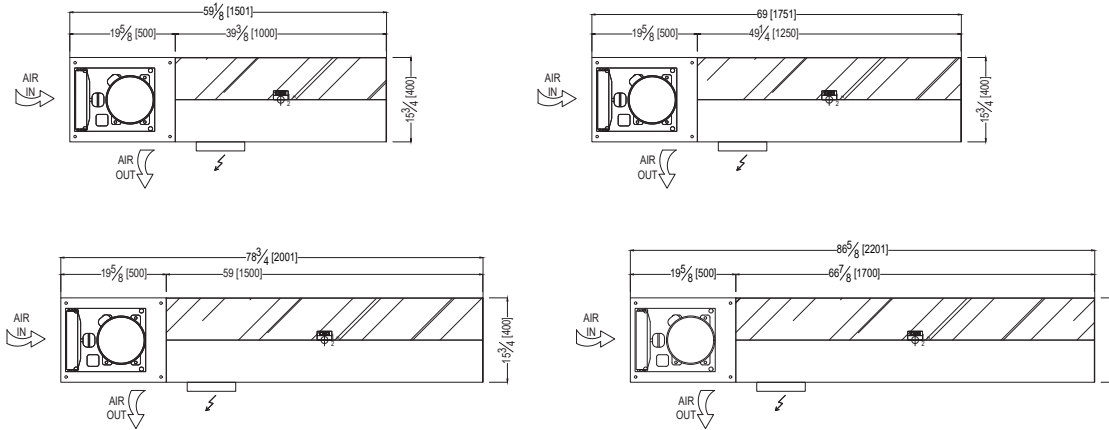


ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

SUSHI - SELF CONTAINED **REAR ELEVATIONS (OPERATOR SIDE)**

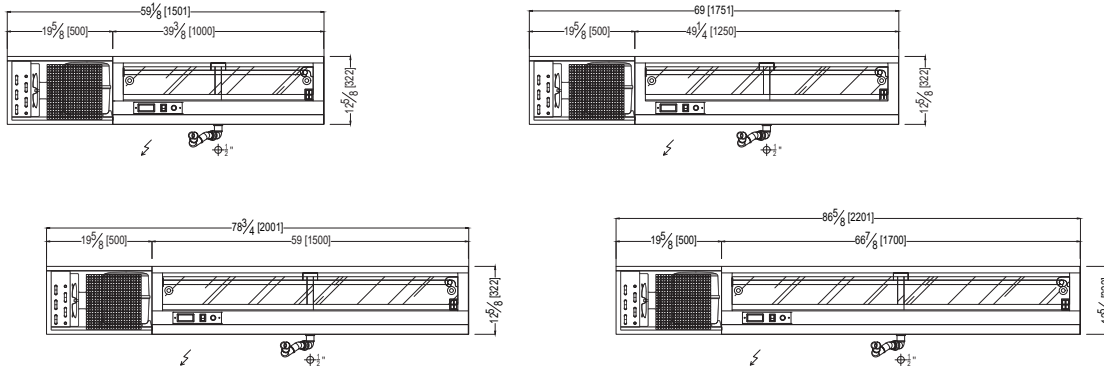

SUSHI - SELF CONTAINED **SECTION VIEWS**

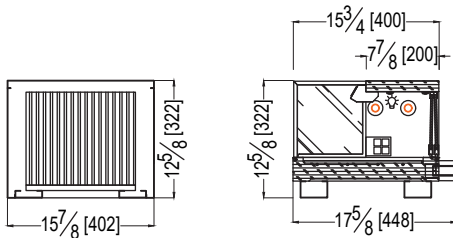

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.


OSCARTEK®
 512 South Airport Blvd., South San Francisco, CA 94080
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com




SELF CONTAINED MODELS: SUSHI 1000SC, 1250SC, 1500SC, 1700SC

REMOTE CONDENSING UNIT MODELS: SUSHI 1000R, 1250R, 1500R, 1700R, 2000R, A90R


SUSHI - REMOTE CONDENSING UNIT **PLAN VIEWS**

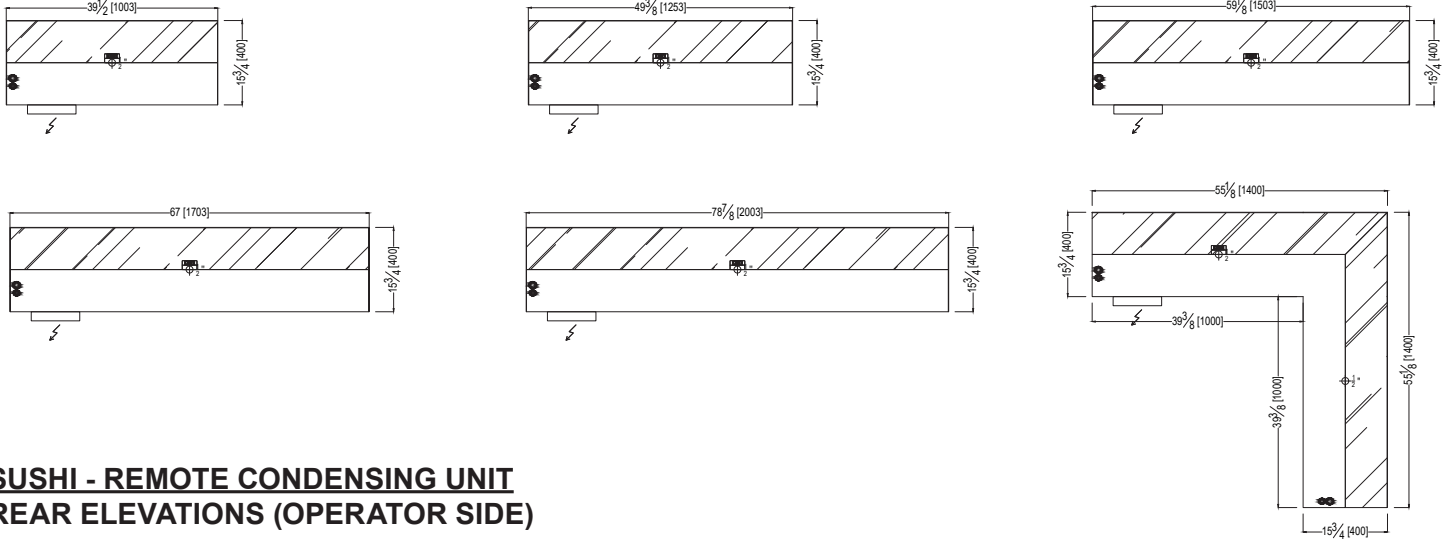

SUSHI - REMOTE CONDENSING UNIT **REAR ELEVATIONS (OPERATOR SIDE)**

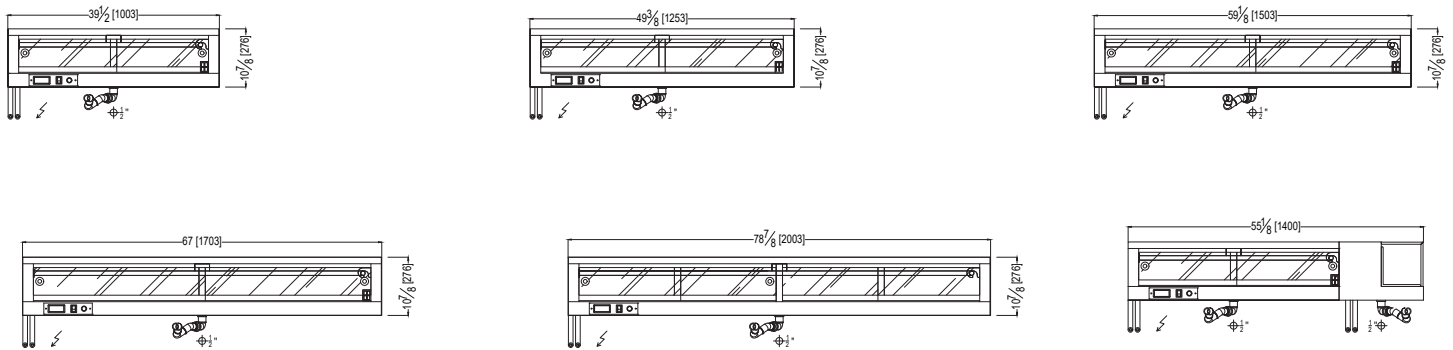

SUSHI - REMOTE CONDENSING UNIT **SECTION VIEWS**



*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com



Discover the Art of Display...

Project Name: _____

Item #: _____ Quantity: _____

SELF CONTAINED MODELS: SUSHI 1000SC, 1250SC, 1500SC, 1700SC

REMOTE CONDENSING UNIT MODELS: SUSHI 1000R, 1250R, 1500R, 1700R, 2000R, A90R

SUSHI - SELF CONTAINED					
TECHNICAL FEATURES		MODELS			
Model Name (Model Code)		SUSHI 1000SC	SUSHI 1250SC	SUSHI 1500SC	SUSHI 1700SC
External Dimensions (L-D-H)	Inches	*59 1/8" - 15 3/4" - 12 5/8"	*69" - 15 3/4" - 12 5/8"	*78 3/4" - 15 3/4" - 12 5/8"	*86 5/8" - 15 3/4" - 12 5/8"
Inches-MM	MM	*1501 - 400 - 322	*1751 - 400 - 322	*2001 - 400 - 322	*2201 - 400 - 322
Crated Dimensions (L-D-H)	Inches	66" - 23" - 24"	76" - 23" - 24"	86" - 23" - 24"	66" - 23" - 24"
Inches-MM	MM	1680 - 580 - 592	1930 - 580 - 592	2180 - 580 - 592	1680 - 580 - 595
Refrigeration	Type	Static	Static	Static	Static
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°F	35°F to 41°F	35°F to 41°F	35°F to 41°F	35°F to 41°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	500/4.8	590/5.0	650/6.0	750/6.8
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic
Climatic Class	°F/%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R290	R290	R290	R290
Pipe Size (Inches)	Suction - Liquid	3/8" - 1/4"	3/8" - 1/4"	3/8" - 1/4"	3/8" - 1/4"
Net Weights	Lb	243	287	331	397
Crated Weights	Lb	300	337	381	447

**** *Minimum clearance: 4" (100mm)**** *DIMENSIONS WITH POLISHED S/S SIDES

SUSHI - REMOTE							
TECHNICAL FEATURES		MODELS					
Model Name (Model Code)		SUSHI 1000R	SUSHI 1250R	SUSHI 1500R	SUSHI 1700R	SUSHI 2000R	SUSHI A90R
External Dimensions (L-D-H)	Inches	*39 1/2" - 15 3/4" - 10 7/8"	*49 3/8" - 15 3/4" - 10 7/8"	*59 1/10" - 15 3/4" - 10 7/8"	*67" - 15 3/4" - 10 7/8"	*78 7/8" - 15 3/4" - 10 7/8"	*55 1/8" - 15 3/4" - 10 7/8"
Inches-MM	MM	*1003 - 400 - 276	*1253 - 400 - 276	*1503 - 400 - 276	*1703 - 400 - 276	*2003 - 400 - 276	*1400 - 400 - 276
Crated Dimensions (L-D-H)	Inches	47" - 23" - 22"	57" - 23" - 22"	66" - 23" - 22"	74" - 23" - 22"	86" - 23" - 22"	62" - 23" - 22"
Inches-MM	MM	1180-580-546	1430 -580-546	1680-580-546	1880-580-546	2180-580-546	1580-580-546
Refrigeration	Type	Static	Static	Static	Static	Static	Static
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck	Deck	Deck
Operating Temperature	°F	35°F to 41°F	35°F to 41°F	35°F to 41°F	35°F to 41°F	35°F to 41°F	35°F to 41°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ -30°F Evap Temperature	BTU's	560	730	870	1000	1120	1320
Electric Supply	(V/Ph/Hz)	120/1/60	120/1/60	120/1/60	120/1/60	120/1/60	120/1/60
Power Consumption	(W/A)	590/5	650/6	690/6.1	750/6.8	800/7.9	1050/9.8
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic	Automatic	Automatic
Climatic Class	°F/%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R452a	R452a	R452a	R452a	R452a	R452a
Pipe Size (Inches)	Suction - Liquid	3/8" - 1/4"	3/8" - 1/4"	3/8" - 1/4"	3/8" - 1/4"	15/32" - 1/4"	15/32" - 1/4"
Net Weights	Lb	110	154	198	231	265	287
Crated Weights	Lb	160	204	248	281	315	337

*DIMENSIONS WITH POLISHED S/S SIDES

*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

