




# METRO PLUS

## Deli/Pastry Showcase Medium & Low Temp

**MEDIUM TEMP (+4°C/39.2°F)  
& LOW TEMP (-20°C/-4°F)**

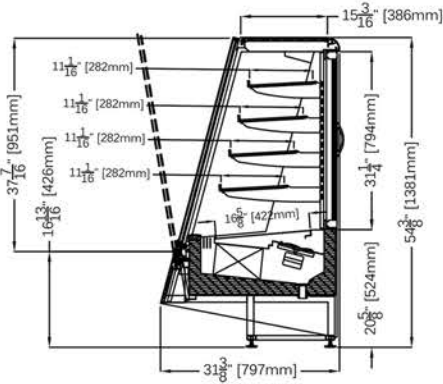

**OPTIONAL: SELF CONTAINED**

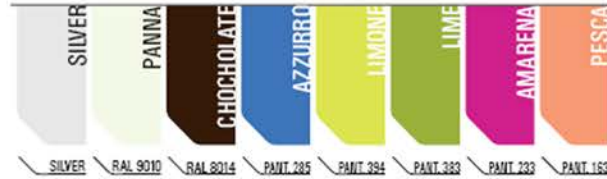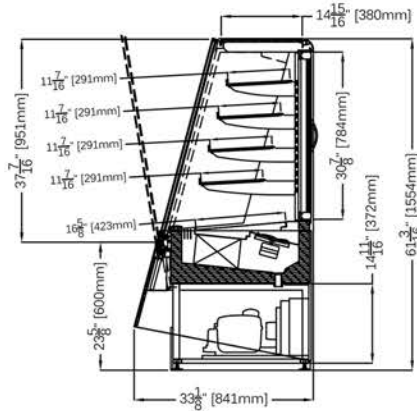

### STANDARD FEATURES

- LED lighting system
- Front, top and side double glasses
- Remote condensing unit
- Cases ship standard unfinished

### OPTIONS

- Dual temperature switch (-20°C/+4°C) (-4°F/+39.2°F)
- Self contained
- Castors

### METRO PLUS DELI/PASTRY

TECHNICAL FEATURES		MEDIUM TEMP MODELS		LOW TEMP MODELS	
		METRO PLUS DPMT1150	METRO PLUS DPMT1650	METRO PLUS DPLT1150	METRO PLUS DPLT1650
External Dimensions (L-D-H)	Inches	45 1/4" - 31 1/8" - 54 3/8"	64 15/16" - 31 1/8" - 54 3/8"	45 1/4" - 33 1/8" - 61 3/16"	64 15/16" - 33 1/8" - 61 3/16"
	MM	1150 - 797 - 1381	1650 - 797 - 1381	1150 - 841 - 1554	1650 - 841 - 1554
Crated Dimensions (L-D-H)	Inches	51 1/4" - 38 5/8" - 60"	78" - 38 5/8" - 63 3/4"	54 3/4" - 38 5/8" - 67"	78" - 38 5/8" - 67"
	MM	1301 - 980 - 1524	1981 - 980 - 1620	1390 - 980 - 1701	1981 - 980 - 11701
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck / Shelves	Deck / Shelves	Deck / Shelves	Deck / Shelves
Operating Temperature	°C / °F	+4°C / 39.2°F	+4°C / 39.2°F	-20°C / 39.2°F	-20°C / 39.2°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Semihermetic	1 / Semihermetic
BTU'S @ +35°F Evap Temp	BTU'S	3840 BTU'S	4480 BTU'S	7360 BTU'S	11,520 BTU'S
(Low Temp -25°F Evap Temp)					
Electric Supply	(V/Ph/Hz)	230/1/50 (EU) 120/1/60 (USA)	230/1/50 (EU) 120/1/60 (USA)	230/1/50 (EU) 220/1/60 (USA)	230/1/50 (EU) 220/1/60 (USA)
Power Consumption	(W/A)	1000W / 5.8A	1200W / 8.5A	1600W / 9A	1015W / 6.8A
Defrost	Mode/Type	Electric	Electric	Invert Cycle	Invert Cycle
Climatic Class	N°°C/F°/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	170Kgs / 374Lbs	220Kgs / 485Lbs	170Kgs / 374Lbs	220Kgs / 485Lbs
Crated Weights	Kg/Lb	260Kgs / 573Lbs	340Kgs / 749Lbs	260Kgs / 573Lbs	340Kgs / 749Lbs

\* Dimensions are without side panels



361-367 Beach Road, Burlingame, CA 94010  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com

