



Discover the Art of Display...



Photo shown with front and sides by others.
Standard cases are unfinished front with stainless steel sides.

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)

Project Name: _____

Item #: _____ Quantity: _____

ROSA PRO CHEESE & CHARCUTERIE SHOWCASE

MODELS: ROSA PRO CC900, CC1000, CC1300, CC1500, CC1700, CC2000, CC2100, CC2600, CC3000, CCA90SQ, CCA90C

STANDARD FEATURES

- Extra clear glass: front and top glasses with front air baffle
- Heated glass sides
- Diffused LED lighting 3000°K
- Sliding acrylic back doors
- Stainless steel lower interior foam tub
- Galvanized chassis structure
- All tempered glass
- Cases ship standard unfinished front and stainless steel sides

OPTIONS

- Available in 53 1/8"H with non-refrigerated shelf
- Narrow depth 25 7/16"D
- Lift up top glass
- Lift up mechanism for display plate and evaporator (linear models only)
- Work top perimeter (brushed s/s, corian, black HPL, granite)
- Stainless steel step shelf
- Cold storage
- Remote condensing unit
- RAL color finish/wood laminate front and side panels
- Epoxy RAL color interior over stainless steel
- Heated pan for evaporator
- Casters

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




ROSA PRO CHEESE & CHARCUTERIE SHOWCASE

MODELS: ROSA PRO CC900, CC1000, CC1300, CC1500, CC1700, CC2000, CC2100, CC2600, CC3000, CCA90SQ, CCA90C


STANDARD: ROSA PRO CHEESE & CHARCUTERIE PLAN VIEWS

ROSA PRO CHEESE & CHARCUTERIE LINEAR MODELS

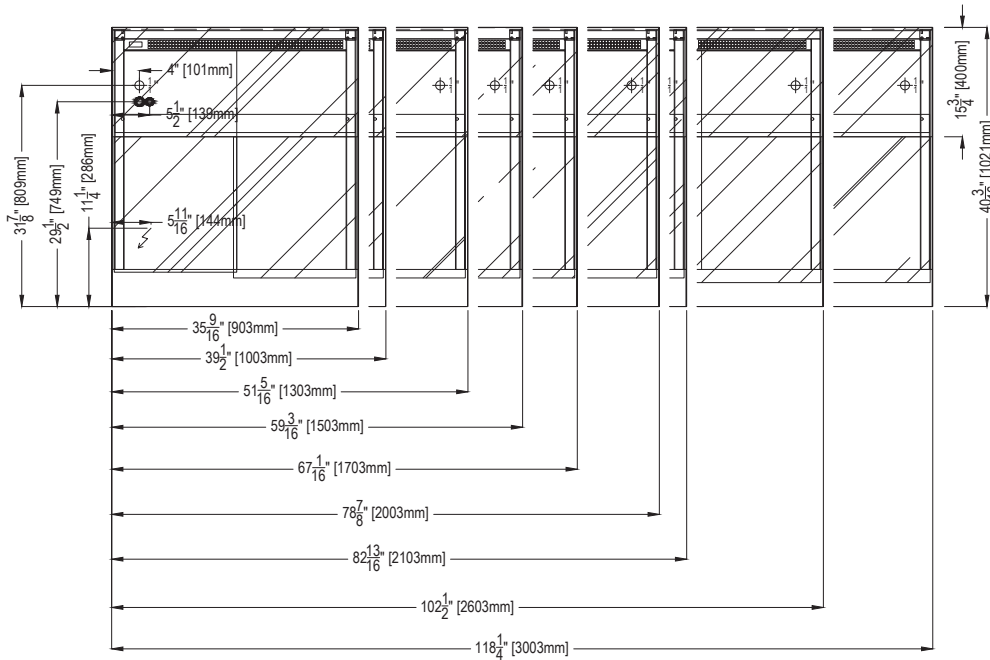


ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

ROSA PRO CCA90SQ

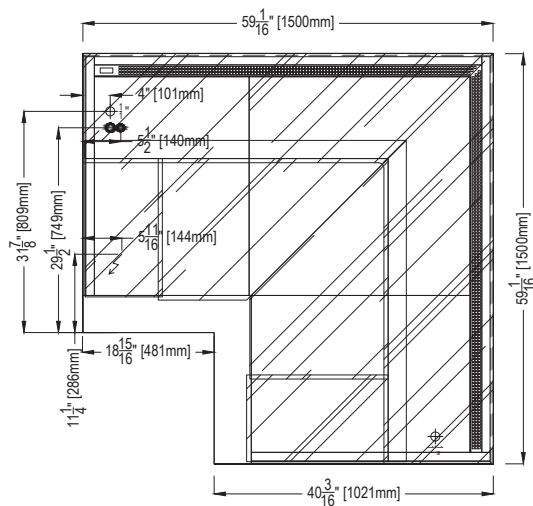

ROSA PRO CCA90C

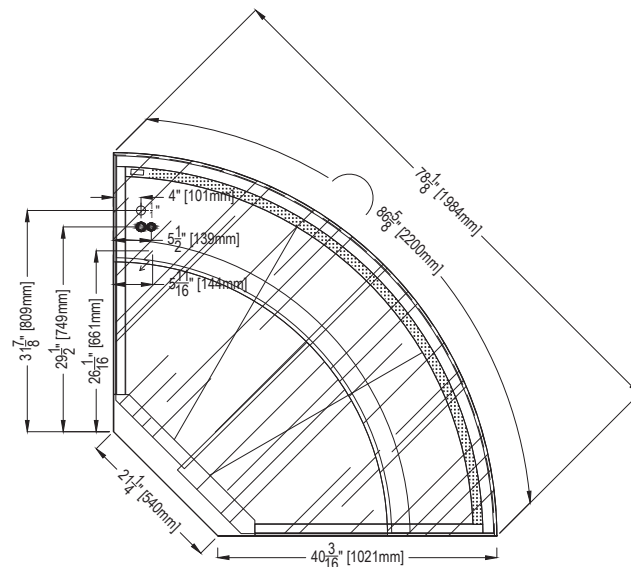

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




ROSA PRO CHEESE & CHARCUTERIE SHOWCASE


MODELS: ROSA PRO CC900, CC1000, CC1300, CC1500, CC1700, CC2000, CC2100, CC2600, CC3000, CCA90SQ, CCA90C

STANDARD: ROSA PRO CHEESE & CHARCUTERIE REAR ELEVATIONS(OPERATOR SIDE)


ROSA PRO CHEESE & CHARCUTERIE LINEAR MODELS

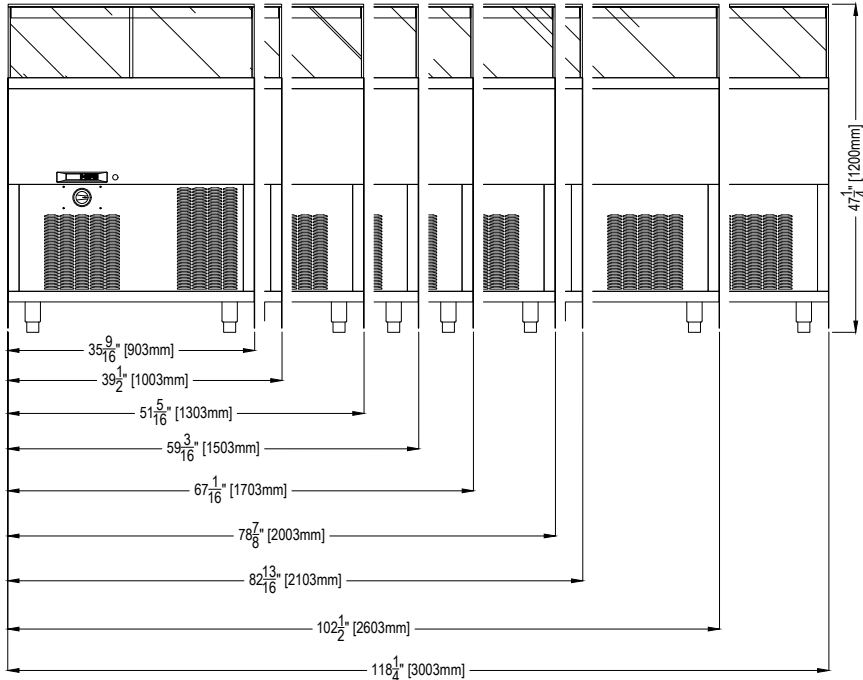

ROSA PRO CCA90SQ

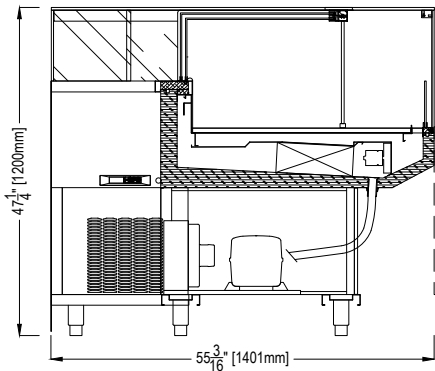

ROSA PRO CCA90C

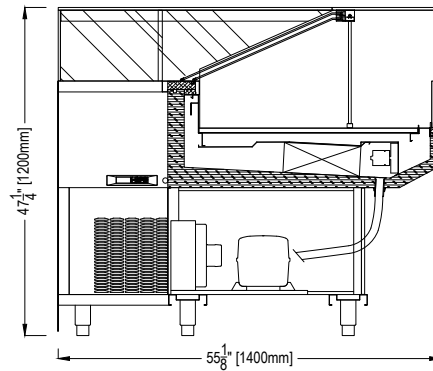

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*


OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

ROSA PRO CHEESE & CHARCUTERIE SHOWCASE


MODELS: ROSA PRO CC900, CC1000, CC1300, CC1500, CC1700, CC2000, CC2100, CC2600, CC3000, CCA90SQ, CCA90C

STANDARD: ROSA PRO CHEESE & CHARCUTERIE SECTION VIEWS


ALL ROSA PRO CHEESE & CHARCUTERIE
LINEAR MODELS + CCA90SQ
(EXCEPT FOR ROSA CC3000)

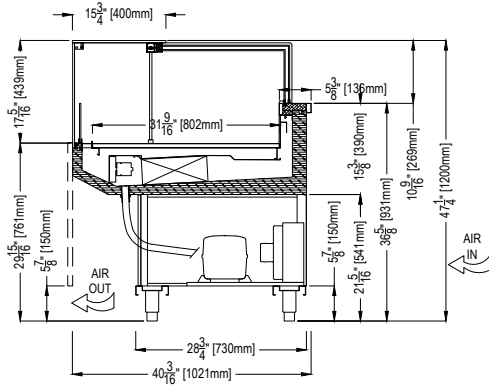

ROSA PRO CC3000

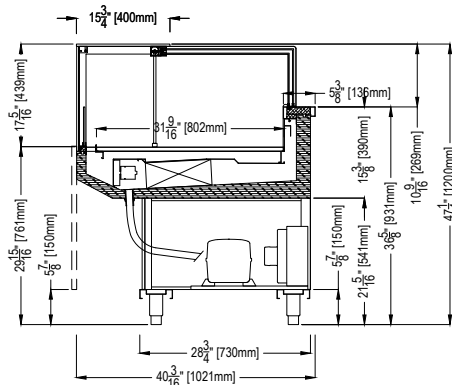


ROSA PRO CCA90C

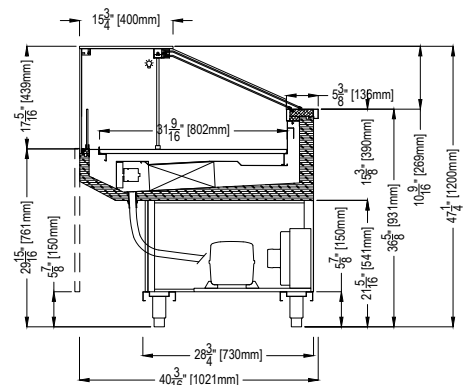


OPTIONAL: ROSA PRO CHEESE & CHARCUTERIE SECTION VIEWS

ROSA PRO CHEESE & CHARCUTERIE
AVAILABLE IN 53 1/8"H
WITH NON-REFRIGERATED SHELF

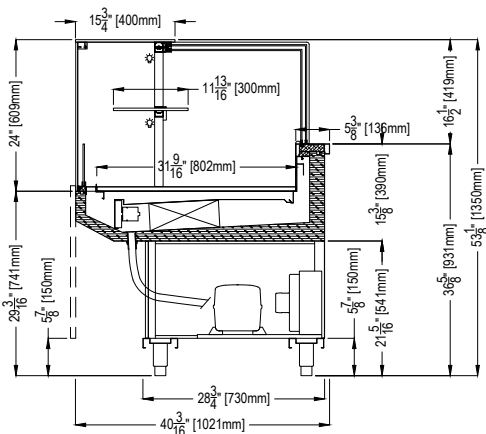

ROSA PRO CHEESE & CHARCUTERIE
WITH COLD STORAGE
AVAILABLE IN 47 1/4"H & 53 1/8"H

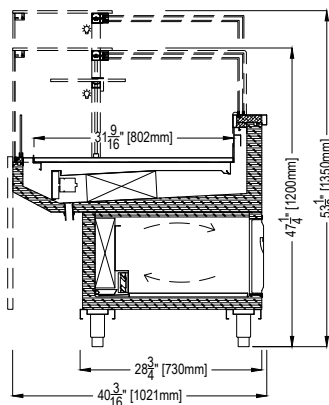

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



Discover the Art of Display...

Project Name: _____

Item #: _____ Quantity: _____

ROSA PRO CHEESE & CHARCUTERIE SHOWCASE

MODELS: ROSA PRO CC900, CC1000, CC1300, CC1500, CC1700, CC2000, CC2100, CC2600, CC3000, CCA90SQ, CCA90C

ROSA PRO CHEESE & CHARCUTERIE						
TECHNICAL FEATURES		MODELS				
		ROSA PRO CC900	ROSA PRO CC1000 (ROSAPCCR43912)	ROSA PRO CC1300	ROSA PRO CC1500 (ROSAPCCR45912)	ROSA PRO CC1700
External Dimensions (L-D-H)	Inches	*35 9/16" - 40 3/16" - 47 1/4"	*39 1/2" - 40 3/16" - 47 1/4"	*51 5/16" - 40 3/16" - 47 1/4"	*59 3/16" - 40 3/16" - 47 1/4"	*67 1/16" - 40 3/16" - 47 1/4"
Inches-MM	MM	*903 - 1021 - 1200	*1003 - 1021 - 1200	*1303 - 1021 - 1200	*1503 - 1021 - 1200	*1703 - 1021 - 1200
External Dimensions (L-D-H)	Inches	54" - 50" - 70"	54" - 50" - 70"	70" - 50" - 70"	70" - 50" - 70"	70" - 50" - 70"
Inches-MM	MM	1380-1260-1780	1380-1260-1780	1780-1260-1780	1780-1260-1780	1780-1260-1780
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck	Deck
Operating Temperature	*F	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +14°F Evap	BTU's	4500	5200	5600	6200	6400
Electric Supply	(V/Ph/Hz)	115/1/60	115/1/60	115/1/60	115/1/60	115/1/60
Power Consumption	(W/A)	550/5.2	550/5.2	650/5.9	750/6.2	980/8.1
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic	Automatic
Climatic Class	*F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	3/8" Suction, 1/4" Liquid	3/8" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid
Net Weights	Lb	230	250	280	300	340
Crated Weights	Lb	660	660	748	770	792

*DIMENSIONS ARE WITH POLISHED S/S SIDES

ROSA PRO CHEESE & CHARCUTERIE					
TECHNICAL FEATURES		MODELS			
		ROSA PRO CC2000 (ROSAPCCR47912)	ROSA PRO CC2100	ROSA PRO CC2600 (ROSAPCCR41012)	ROSA PRO CC3000 (ROSAPCCR41112)
External Dimensions (L-D-H)	Inches	*78 7/8" - 40 3/16" - 47 1/4"	*82 13/16" - 40 3/16" - 47 1/4"	*102 1/2" - 40 3/16" - 47 1/4"	*118 1/4" - 40 3/16" - 47 1/4"
Inches-MM	MM	*2003 - 1021 - 1200	*2103 - 1021 - 1200	*2603 - 1021 - 1200	*3003 - 1021 - 1200
External Dimensions (L-D-H)	Inches	88" - 50" - 70"	88" - 50" - 70"	109" - 47" - 55 1/4"	125" - 47" - 55 1/4"
Inches-MM	MM	2230-1260-1780	2230-1260-1780	2768 - 1193 - 1400	3175 - 1193 - 1400
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	*F	38°F to 41°F	38°F to 41°F	38°F to 41°F	38°F to 41°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +14°F Evap	BTU's	4000	4500	4800	5500
Electric Supply	(V/Ph/Hz)	115/1/60	115/1/60	115/1/60	115/1/60
Power Consumption	(W/A)	1160/9.5	1360/11.5	1500/14.2	1750/14.5
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic
Climatic Class	*F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	380	400	480	500
Crated Weights	Lb	1065	1087	1110	1132

*DIMENSIONS ARE WITH POLISHED S/S SIDES

ROSA PRO CHEESE & CHARCUTERIE			
TECHNICAL FEATURES		MODELS	
		ROSA PRO CCA90SQ (ROSAPCCR4AP9012)	ROSA PRO CCA90C
Inches-MM	MM	*1503 - 1021 - 1200	*1984 - 1021 - 1200
Inches-MM	MM	1780 - 1780 - 1780	1780 - 1780 - 1780
Refrigeration	Type	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck	Deck
Operating Temperature	*F	38°F to 41°F	38°F to 41°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic
Temperature	BTU's	4800	5200
Electric Supply	(V/Ph/Hz)	115/1/60	115/1/60
Power Consumption	(W/A)	1500/14.2	1500/14.2
Defrost	Mode/Type	Automatic	Automatic
Climatic Class	*F/H.R.	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	440	440
Crated Weights	Lb	990	990

*DIMENSIONS ARE WITH POLISHED S/S SIDES

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

