



Photo shown with optional finish. Standard cases are unfinished front with stainless steel sides.

Visit our website for optional RAL colors and Materials finishes.

RAL colors - <https://www.ral-farben.de/en/all-ral-colours>

Materials - <https://www.oscartek.com/downloads/os-cartek-materials-brochure.pdf>

ROSA PRO CHOCOLATE SHOWCASE

MODELS: ROSA PRO C900, C1000, C1300, C1500, C1700, C2000, C2100, C2600, C3000, CA90SQ, CA90C

STANDARD FEATURES

- Humidity control
- Extra clear glass: front, top, and sides glasses with front air baffle
- Diffused LED lighting 3000°K
- Sliding acrylic back doors
- Stainless steel lower interior foam tub
- Galvanized chassis structure
- All tempered glass
- Cases ship standard unfinished front and stainless steel sides

OPTIONS

- Available in 53 1/8"H with non-refrigerated shelf
- Narrow depth 25 7/16"D
- Lift up top glass
- Lift up mechanism for display plate and evaporator (linear models only)
- Work top perimeter (brushed s/s, corian, black HPL, granite)
- Stainless steel step shelf
- Cold storage
- Remote condensing unit
- RAL color finish/wood laminate front and side panels
- Epoxy RAL color interior over stainless steel
- Unfinished panels to accept custom millwork by others
- Heated pan for evaporator
- Casters

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*


OSCARTEK
 512 South Airport Blvd., South San Francisco, CA 94080
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
 sales@oscartek.com | www.oscartek.com

ROSA PRO CHOCOLATE

MODELS: ROSA PRO C900, C1000, C1300, C1500, C1700, C2000, C2100, C2600, C3000, CA90SQ, CA90C


STANDARD: ROSA PRO CHOCOLATE PLAN VIEWS

ROSA PRO CHOCOLATE LINEAR MODELS

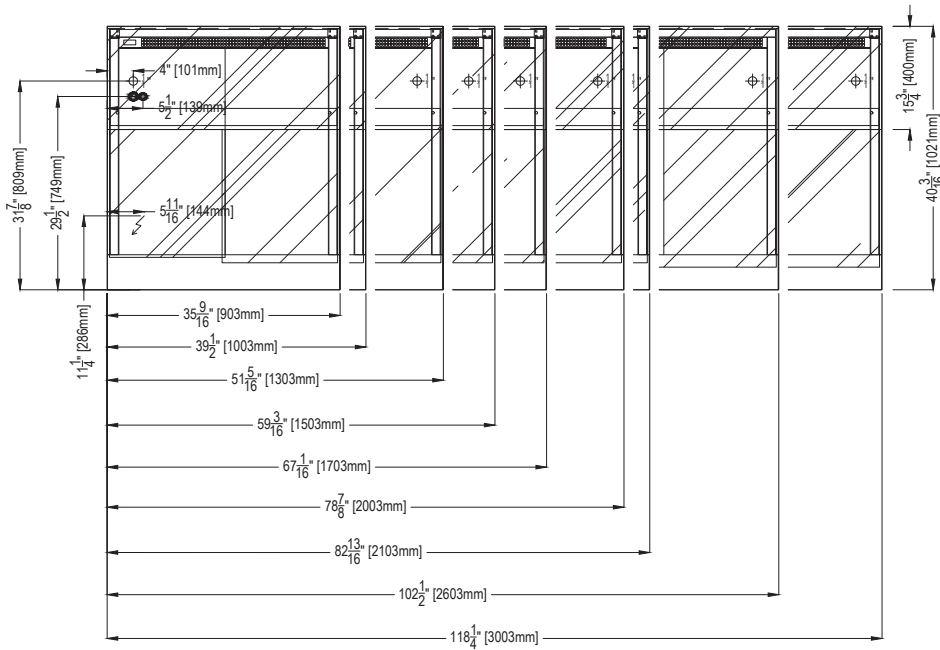


ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

ROSA PRO CA90SQ

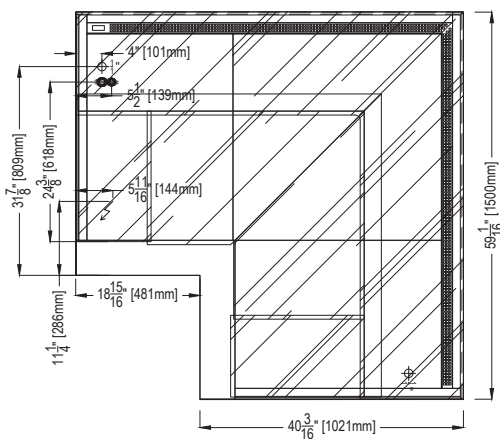

ROSA PRO CA90C

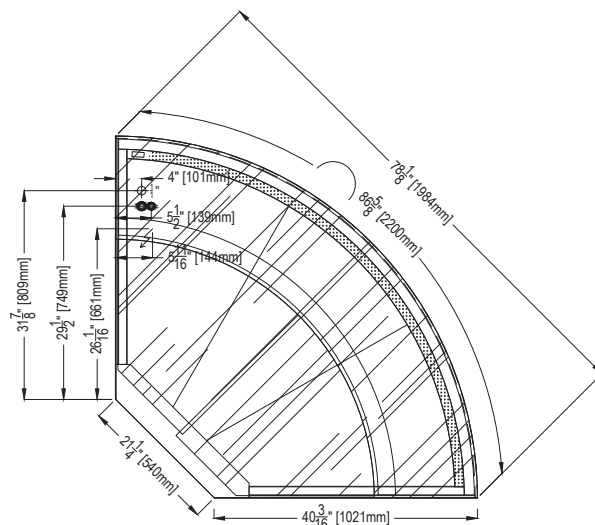

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




ROSA PRO CHOCOLATE

MODELS: ROSA PRO C900, C1000, C1300, C1500, C1700, C2000, C2100, C2600, C3000, CA90SQ, CA90C


STANDARD: ROSA PRO CHOCOLATE

REAR ELEVATIONS(OPERATOR SIDE)


ROSA PRO CHOCOLATE LINEAR MODELS

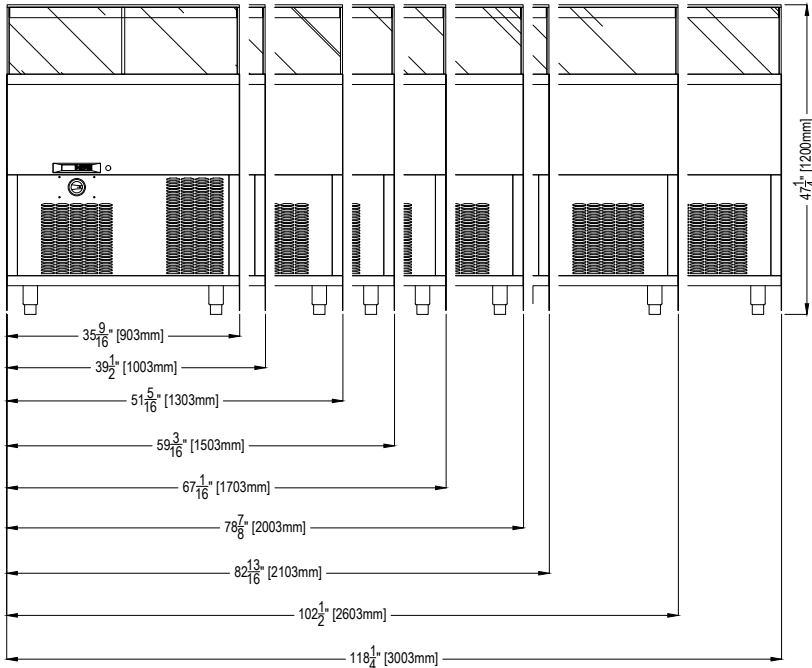

ROSA PRO CA90SQ

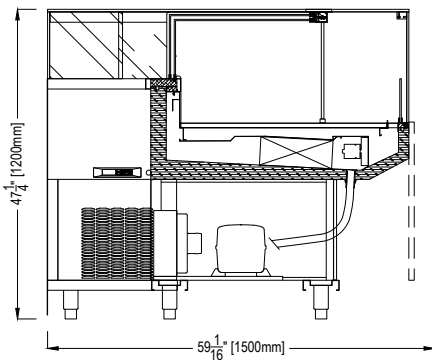

ROSA PRO CA90C

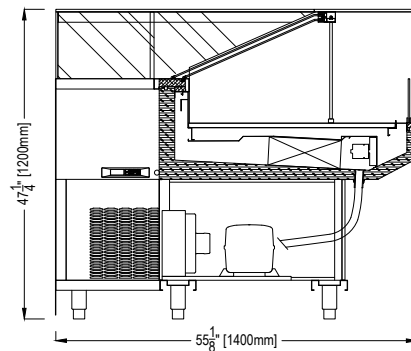

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.


OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

ROSA PRO CHOCOLATE


MODELS: ROSA PRO C900, C1000, C1300, C1500, C1700, C2000, C2100, C2600, C3000, CA90SQ, CA90C

STANDARD: ROSA PRO CHOCOLATE SECTION VIEWS


**ALL ROSA PRO CHOCOLATE LINEAR MODELS
+ CA90SQ (EXCEPT FOR ROSA C3000)**

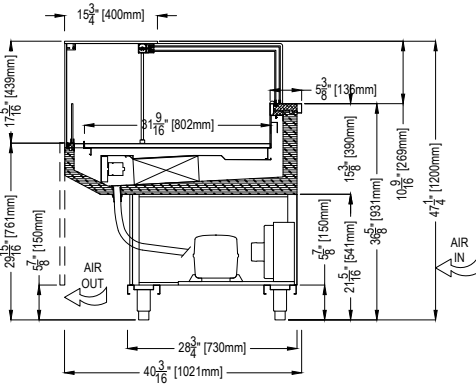

ROSA PRO C3000

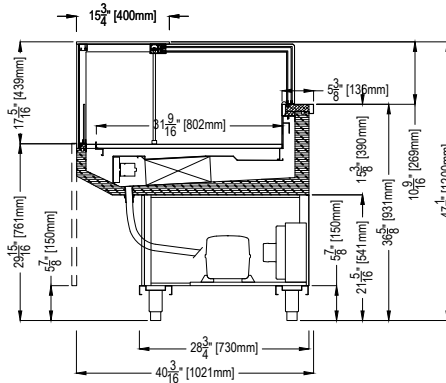


ROSA PRO CA90C

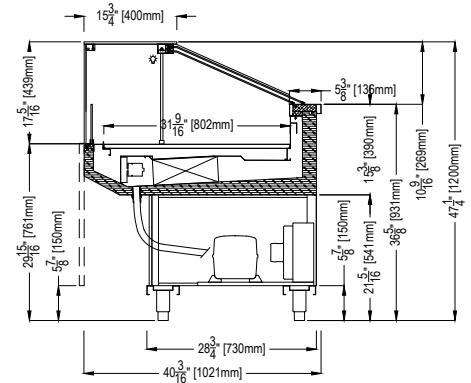


OPTIONAL: ROSA PRO CHOCOLATE SECTION VIEWS

**ROSA PRO CHOCOLATE -
AVAILABLE IN 53 1/8\"H
WITH NON-REFRIGERATED SHELF**

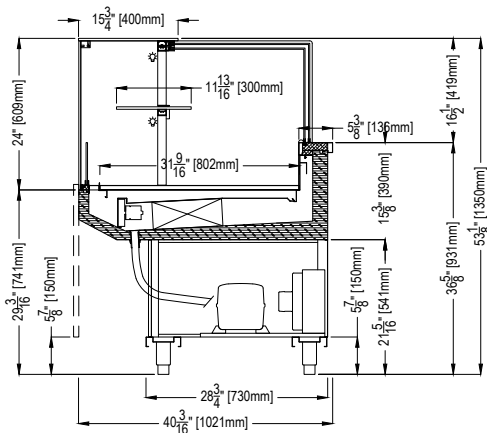

**ROSA PRO CHOCOLATE
WITH COLD STORAGE
AVAILABLE IN 47 1/4\"H & 53 1/8\"H**

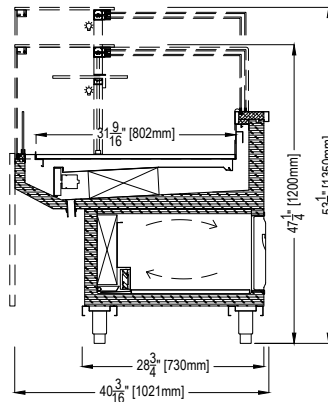

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com





Project Name: _____

Item #: _____ Quantity: _____

Discover the Art of Display...

ROSA PRO CHOCOLATE

MODELS: ROSA PRO C900, C1000, C1300, C1500, C1700, C2000, C2100, C2600, C3000, CA90SQ, CA90C

ROSA PRO CHOCOLATE						
TECHNICAL FEATURES		MODELS				
		ROSA PRO C900	ROSA PRO C1000	ROSA PRO C1300	ROSA PRO C1500	ROSA PRO C1700
External Dimensions (L-D-H)	Inches	*35 9/16" - 40 3/16" - 47 1/4"	*39 1/2" - 40 3/16" - 47 1/4"	*51 5/16" - 40 3/16" - 47 1/4"	*59 3/16" - 40 3/16" - 47 1/4"	*67 1/16" - 40 3/16" - 47 1/4"
Inches-MM	MM	*903 - 1021 - 1200	*1003 - 1021 - 1200	*1303 - 1021 - 1200	*1503 - 1021 - 1200	*1703 - 1021 - 1200
External Dimensions (L-D-H)	Inches	54" - 50" - 70"	54" - 50" - 70"	70" - 50" - 70"	70" - 50" - 70"	70" - 50" - 70"
Inches-MM	MM	1380-1260-1780	1380-1260-1780	1780-1260-1780	1780-1260-1780	1780-1260-1780
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck	Deck
Operating Temperature	Relative Humidity	55°F to 60°F 55%RH to 65%RH	55°F to 60°F 55%RH to 65%RH	55°F to 60°F 55%RH to 65%RH	55°F to 60°F 55%RH to 65%RH	55°F to 60°F 55%RH to 65%RH
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +35°F Evap Temperature	BTU's	2000	2200	2800	3200	3800
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	690/6.4	710/6.7	850/8.1	1050/9.5	1200/11.4
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic	Automatic
Climatic Class	*F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	3/8" Suction, 1/4" Liquid	3/8" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	1/2" Suction, 1/4" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	230	250	280	300	340
Crated Weights	Lb	660	660	748	770	792

*DIMENSIONS ARE WITH POLISHED S/S SIDES

ROSA PRO CHOCOLATE					
TECHNICAL FEATURES		MODELS			
		ROSA PRO C2000	ROSA PRO C2100	ROSA PRO C2600	ROSA PRO C3000
External Dimensions (L-D-H)	Inches	*78 7/8" - 40 3/16" - 47 1/4"	*82 13/16" - 40 3/16" - 47 1/4"	*102 1/2" - 40 3/16" - 47 1/4"	*118 1/4" - 40 3/16" - 47 1/4"
Inches-MM	MM	*2003 - 1021 - 1200	*2103 - 1021 - 1200	*2603 - 1021 - 1200	*3003 - 1021 - 1200
External Dimensions (L-D-H)	Inches	88" - 50" - 70"	88" - 50" - 70"	109" - 47" - 55 1/4"	125" - 47" - 55 1/4"
Inches-MM	MM	2230-1260-1780	2230-1260-1780	2768 - 1193 - 1400	3175 - 1193 - 1400
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	Relative Humidity	55%RH to 65%RH	55%RH to 65%RH	55%RH to 65%RH	55%RH to 65%RH
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
Temperature	BTU's	4500	4700	5500	6000
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	1300/12.3	1350/12.8	1500/13.9	1650/15.8
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic
Climatic Class	*F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 3/8" Liquid
Net Weights	Lb	380	400	480	500
Crated Weights	Lb	1065	1087	1110	1132

*DIMENSIONS ARE WITH POLISHED S/S SIDES

ROSA PRO CHOCOLATE			
TECHNICAL FEATURES		MODELS	
		ROSA PRO CA90SQ	ROSA PRO CA90C
External Dimensions (L-D-H)	Inches	*59 1/8" - 40 3/16" - 47 1/4"	*78 1/8" - 40 3/16" - 47 1/4"
Inches-MM	MM	*1503 - 1021 - 1200	*1984 - 1021 - 1200
External Dimensions (L-D-H)	Inches	70" - 70" - 70"	70" - 70" - 70"
Inches-MM	MM	1780 - 1780 - 1780	1780 - 1780 - 1780
Refrigeration	Type	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck	Deck
Operating Temperature	Relative Humidity	55°F to 60°F 55%RH to 65%RH	55°F to 60°F 55%RH to 65%RH
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic
BTU'S @ +35°F Evap Temperature	BTU's	4500	4800
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	1500/13.9	1500/13.9
Defrost	Mode/Type	Automatic	Automatic
Climatic Class	*F/H.R.	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	440	440
Crated Weights	Lb	990	990

*DIMENSIONS ARE WITH POLISHED S/S SIDES

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com

