



Photo shown with optional RAL color finish. Standard cases are unfinished front with stainless steel sides.

Visit our website for optional RAL colors and Materials finishes.

RAL colors - <https://www.ral-farben.de/en/all-ral-colours>

Materials - <https://www.oscartek.com/downloads/os-cartek-materials-brochure.pdf>



Project Name: _____

Item #: _____ Quantity: _____

ROSA PRO GELATO/ICE CREAM SHOWCASE

MODELS: ROSA PRO G1000, ROSA PRO G1150,
ROSA PRO G1650, ROSA PRO G2150

STANDARD FEATURES

- Extra clear glass: top glass only
- Heated glass front and sides glasses
- Diffused LED lighting 3000°K
- Sliding acrylic back doors
- Stainless steel lower interior foam tub
- Galvanized chassis structure
- All tempered glass
- Cases ship standard unfinished front and stainless steel sides

OPTIONS

- Available in 53 1/8"H
- Narrow depth 25 7/16"D
- Lift up top glass
- Work top perimeter (brushed s/s, corian, black HPL, granite)
- Switch device from low temp. (-18°C) to positive temp. (+4°C)
- Stainless steel display trays for ice cream cakes
- Stainless steel pans (4 liter, 5 liter, and 8 liter)
- Dipper well
- Cone holder
- Remote condensing unit
- Popsicle display tray (stainless steel & plastic)
- Plastic available in color options (see images on the right)
- RAL color finish/wood laminate front and side panels
- Epoxy RAL color interior over stainless steel
- Unfinished panels to accept custom millwork by others
- Casters

**Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.*

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com


ROSA PRO GELATO/ICE CREAM

MODELS: ROSA PRO G1000, ROSA PRO G1150, ROSA PRO G1650, ROSA PRO G2150


STANDARD: ROSA PRO GELATO/ICE CREAM

PLAN VIEWS

5 LITER PANS: ROSA PRO G1000, G1150, G1650, G2150

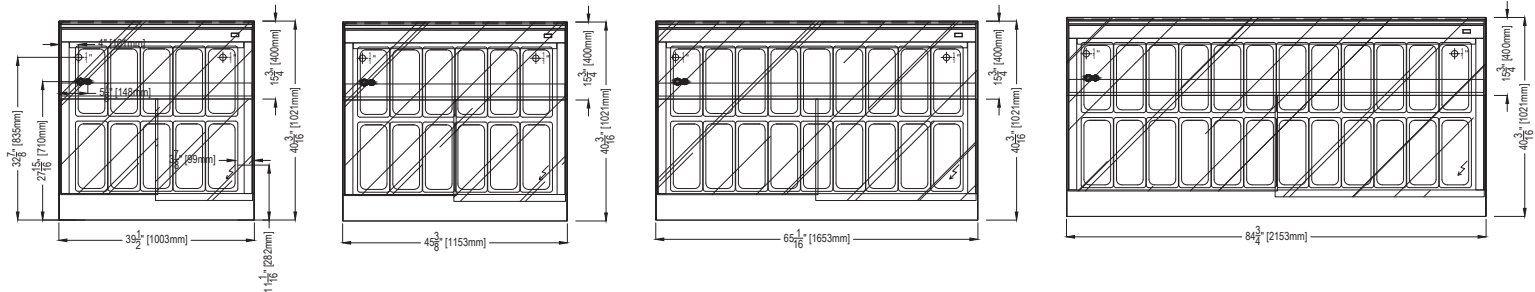


8 LITER PANS: ROSA PRO G1000, G1150, G1650, G2150

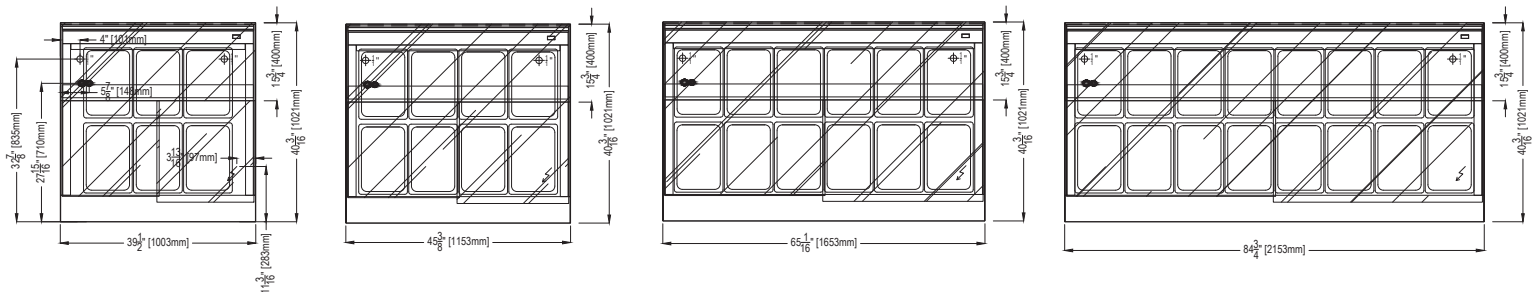

STANDARD: ROSA PRO GELATO/ICE CREAM

REAR ELEVATIONS(OPERATOR SIDE)

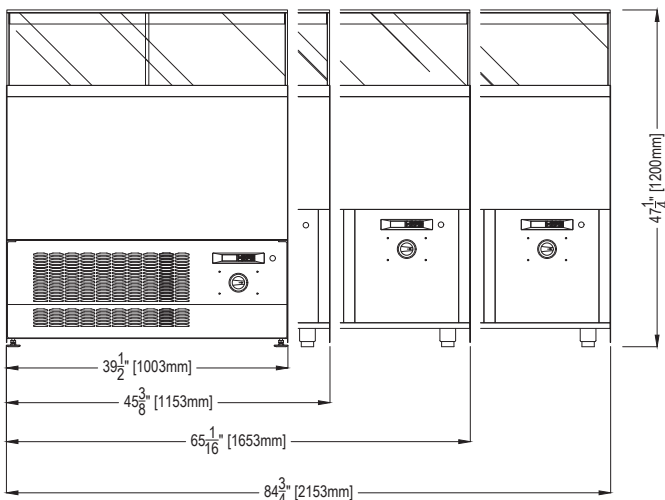

ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK
512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




ROSA PRO GELATO/ICE CREAM


MODELS: ROSA PRO G1000, ROSA PRO G1150, ROSA PRO G1650, ROSA PRO G2150

ROSA PRO GELATO/ICE CREAM SECTION VIEWS


STANDARD: ROSA PRO 47 1/4" H
5 LITER PANS

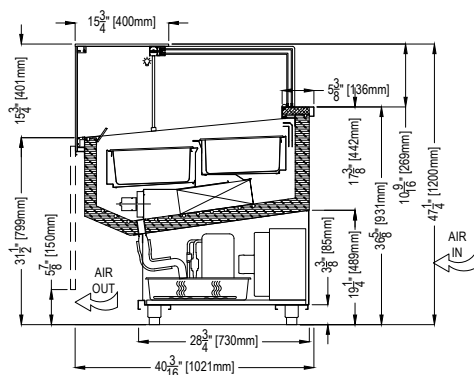

STANDARD: ROSA PRO 47 1/4" H
8 LITER PANS

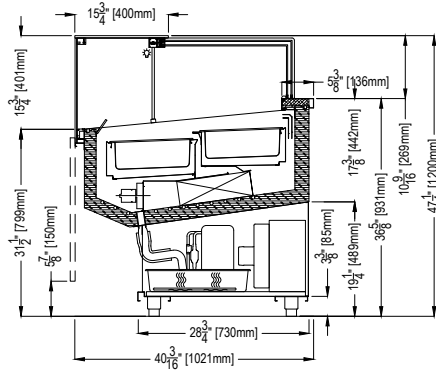

OPTIONAL: ROSA PRO 53 1/8" H

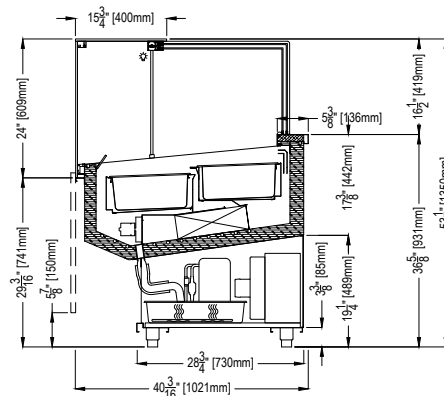

ROSA PRO GELATO/ICE CREAM					
TECHNICAL FEATURES		MODELS			
		ROSA PRO G1000	ROSA PRO G1150 (ROSAPGLR44512)	ROSA PRO G1650 (ROSAPGLR46512)	ROSA PRO G2150 (ROSAPGLR48512)
External Dimensions (L-D-H)	Inches	*39 1/2" - 40 3/16" - 47 1/4"	*45 3/8" - 40 3/16" - 47 1/4"	*65 1/16" - 40 3/16" - 47 1/4"	*84 3/4" - 40 3/16" - 47 1/4"
Inches-MM	MM	*1003 - 1021 - 1200	*1153 - 1021 - 1200	*1653 - 1021 - 1200	*2153 - 1021 - 1200
Crated Dimensions (L-D-H)	Inches	54" - 50" - 70"	54" - 50" - 70"	70" - 50" - 70"	88" - 50" - 70"
Inches-MM	MM	1380-1260-1780	1380-1260-1780	1780-1260-1780	2230-1260-1780
5 Liter Pan Capacity** 14 3/16" x 6 1/2" x 4 3/4" (360mm x 165mm x 120mm)	Pan Configuration				
8 Liter Pan Capacity** 14 3/16" x 9 13/16" x 4 3/4" (360mm x 250mm x 120mm)	Pan Configuration				
Refrigeration	Type	Fan Ventilated	Fan Ventilated	Fan Ventilated	Fan Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°F	-10°F to +20°F	-10°F to +20°F	-10°F to +20°F	-10°F to +20°F
Compressor	Nr./Type	1 / Semi-Hermetic	1 / Semi-Hermetic	1 / Semi-Hermetic	1 / Semi-Hermetic
BTU'S @ -31°F Evap Temperature	BTU'S	1900	1900	2600	3100
Electric Supply	(V/Ph/Hz)	208-220/1/60	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	(W/A)	1700/9.1	1700/9.1	2200/11.5	2700/14.8
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 3/8" Liquid	5/8" Suction, 3/8" Liquid	5/8" Suction, 3/8" Liquid	3/4" Suction, 3/8" Liquid
Net Weights	Lb	365	375	530	605
Crated Weights	Lb	660	682	792	1065

*DIMENSIONS ARE WITH POLISHED S/S SIDES

**PANS NOT INCLUDED

*Oscartek reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400

sales@oscartek.com | www.oscartek.com